


Engineered façades - Façade Panel (horizontal design)

FP H 5.1.02 Outside corner with corner panel.

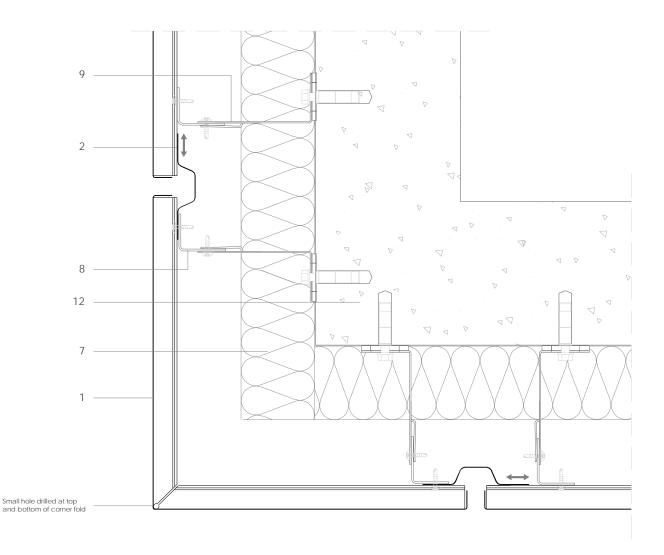

Scale 1/4

Notes:

All rights re

- Corner panels must have a small hole drilled at the top and bottom ends • of the corner fold.
- This drawing is shown with end to end joint FP H 2.1.01. All other joints • are also possible.
- 1. elZinc® cladding
- 2. elZinc® weathering strip
- 3. elZinc® corner profile
- 4. elZinc® retaining strip
- 5. elZinc® perforated strip / perforated panel
- 6. Structural underlay
- 7. Insulation
- 8. Metal rail
- 9. Wall bracket
- 10. Folded galvanised sheet
- 11. Membrane
- 12. Structure

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of eIZne® dadding systems. It is the responsable the archited, building contractor and installer in any case to ensure the validity of the specific details employed on each project. AsB-el/Zne@ rejects any responsability due to direct or indirect damage that may arks from the use of the information contained in this document.

d with recard to this document.

TÜV Non authorised use will be



elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com

All dimensions are indicative unless specified on the drawing

Sheet thickness may be exaggerated for clarity