


ASS H 4.1.02 Front vented split capping - rear 'T' plate.

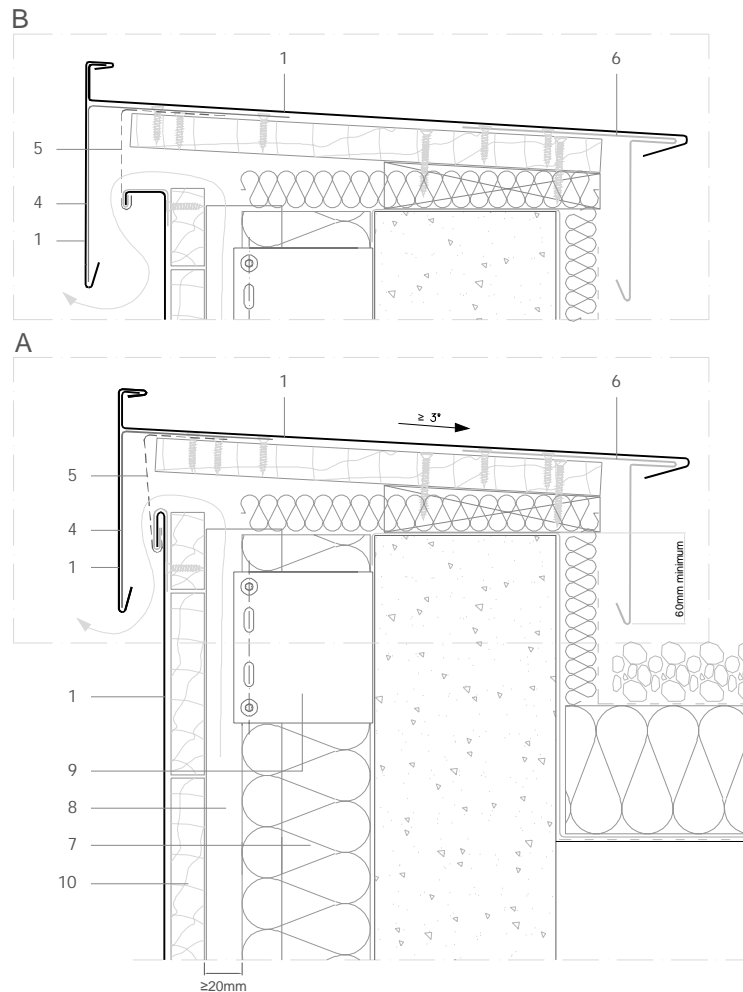

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity


Scale 1/5

Notes:

- 'A' shows the cladding head finished with a flat lock fold.
- 'B' shows the cladding head finished with a standing seam.
- In the absence of local or national regulations, it is recommended that the coping overlap the cladding by a minimum of 60mm.
- Generic structural details are given for indicative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. Wooden batten
9. Wall bracket
10. Substrate

ASS H 4.1.02 Front vented split capping - rear 'T' plate.

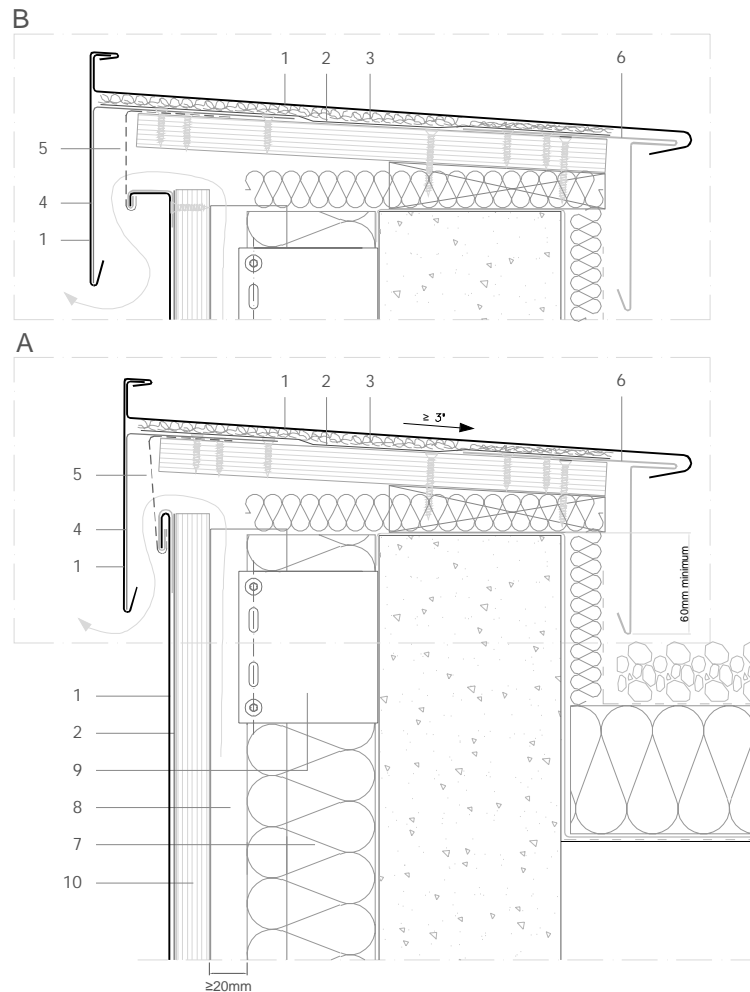

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Scale 1/5

Notes:

- 'A' shows the cladding head finished with a flat lock fold.
- 'B' shows the cladding head finished with a standing seam.
- In the absence of local or national regulations, it is recommended that the coping overlap the cladding by a minimum of 60mm.
- Generic structural details are given for indicative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. Wooden batten
9. Wall bracket
10. Substrate