


# Traditional systems - Angle standing seam (vertical design)

## ASS V 4.1.01 Front vented capping - rear 'T' plate.

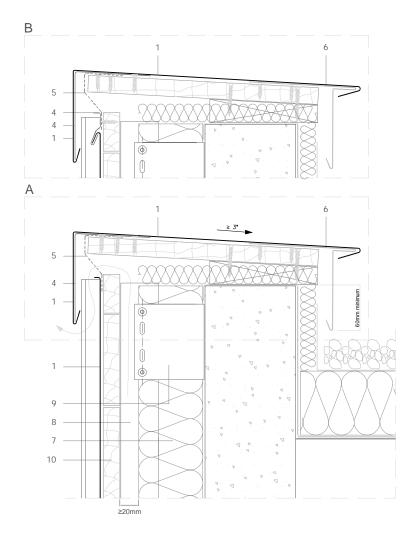

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

#### Scale 1/5

# Notes:

- 'A' shows the top return fold for traditional 'sheet' cladding.
- 'B' shows the top return fold for long strip cladding.
- In the absence of local or national regulations, it is recommended that the coping overlap the cladding by a minimum of 60mm.
- Generic structural details are given for indicative purposes only.
- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles

elZinc®


- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- Wooden batten 8.
- 9. Wall bracket
- 10. Substrate





# Traditional systems - Angle standing seam (vertical design)

## ASS V 4.1.01 Front vented capping - rear 'T' plate.

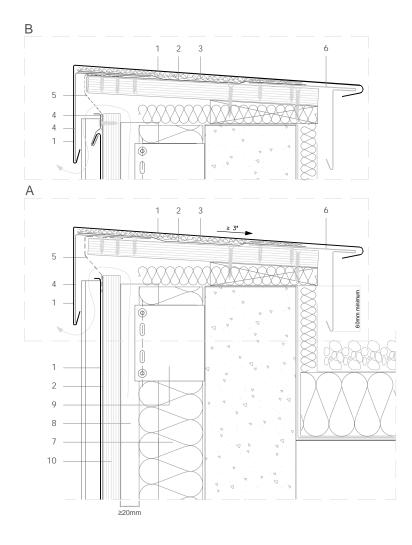

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

# Scale 1/5

# Notes:

- 'A' shows the top return fold for traditional 'sheet' cladding.
- 'B' shows the top return fold for long strip cladding.
- In the absence of local or national regulations, it is recommended that the coping overlap the cladding by a minimum of 60mm.
- Generic structural details are given for indicative purposes only.
- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate