


Traditional systems - Angle standing seam (vertical design)

ASS V 4.1.02 Front vented split capping - rear 'T' plate.

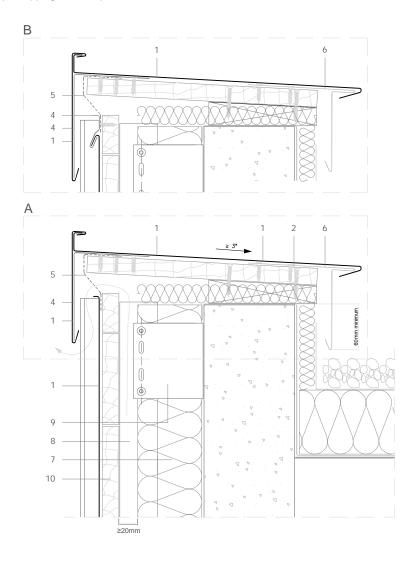

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

Scale 1/5

Notes:

- 'A' shows the top return fold for traditional 'sheet' cladding.
- 'B' shows the top return fold for long strip cladding.
- In the absence of local or national regulations, it is recommended that the coping overlap the cladding by a minimum of 60mm.
- Generic structural details are given for indicative purposes only.
- 1. elZinc® cladding
- Membrane 2.
- Structural underlay 3.
- 4. Folded galvanised steel profiles

elZinc®


- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate






Traditional systems - Angle standing seam (vertical design)

ASS V 4.1.02 Front vented split capping - rear 'T' plate.

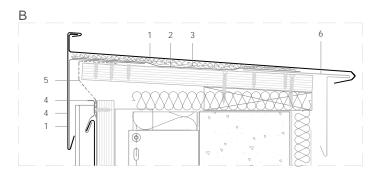

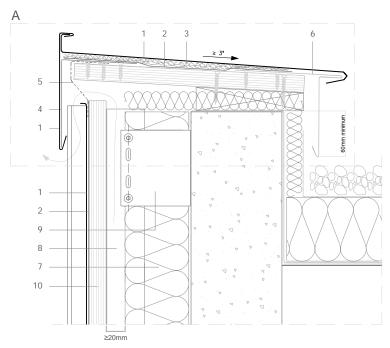

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

Scale 1/5

Notes:

- 'A' shows the top return fold for traditional 'sheet' cladding.
- 'B' shows the top return fold for long strip cladding.
- In the absence of local or national regulations, it is recommended that the coping overlap the cladding by a minimum of 60mm.
- Generic structural details are given for indicative purposes only.
- 1. elZinc® cladding
- Membrane 2.
- Structural underlay 3.
- 4. Folded galvanised steel profiles

elZinc®

- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate

