


FP V 1.1.01 Panel profile.

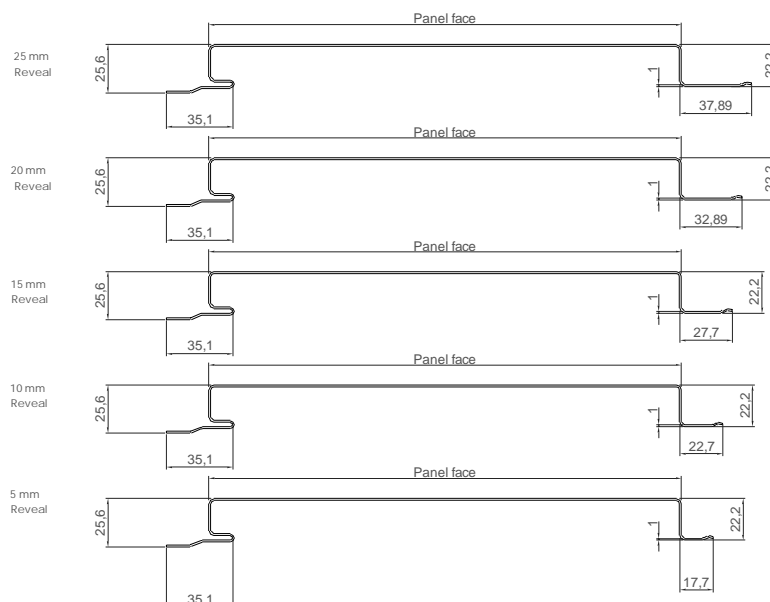

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Scale 1/4

Notes:

- Adjusting the length of the panel's tongue changes the reveal width between panels.
- Dimensions should be checked by assembling two panels and verifying the joint width beforehand.
- Panel profiles shown are for a reveal of 25mm (at the top) and 5mm (at the bottom), in both the hollow drawn and solid drawn pairs of profiles.
- Intermediate reveals from top to bottom are 20, 15, and 10mm.
- At ground level and in public areas, the panels can be given a rigid backing to provide additional impact resistance.
- Standard joint centres width - 300mm with 1mm thick elZinc®.

1. elZinc® cladding
2. elZinc® weathering strip
3. elZinc® corner profile
4. elZinc® retaining strip
5. elZinc® perforated strip / perforated panel
6. Structural underlay
7. Insulation
8. Metal rail
9. Wall bracket
10. Folded galvanised sheet
11. Membrane
12. Structure

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZinc® cladding systems. It is the responsibility of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-elZinc® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document


All rights reserved with regard to this document. Non authorised use will be prosecuted



elZinc®
Tel. +34 984 116 332
Fax. +34 985 493 202
www.elzinc.es

Asturiana de Laminados S.A.
Pol. Ind. de Olloniego, Parcela C1
33660 Olloniego Asturias, Spain
elzinc@aslzinc.com

FP H 1.1.01 Panel profile.

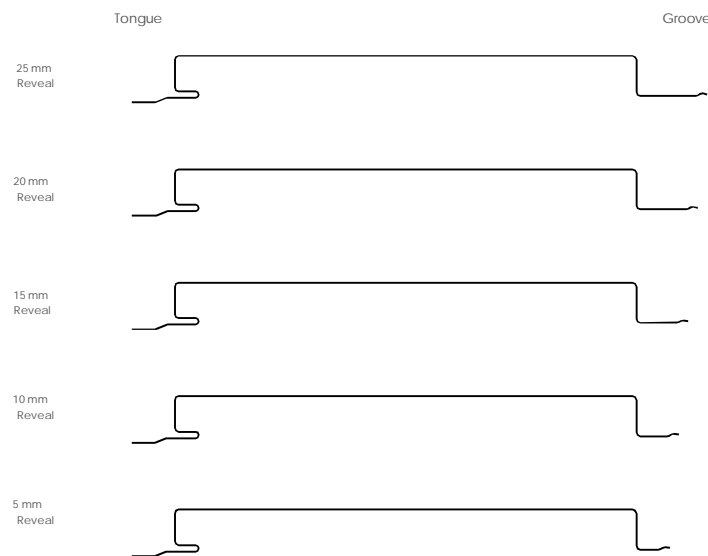

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Scale 1/4

Notes:

- Adjusting the length of the panel's tongue changes the reveal width between panels.
- Dimensions should be checked by assembling two panels and verifying the joint width beforehand.
- Panel profiles shown are for a reveal of 25mm (at the top) and 5mm (at the bottom), in both the hollow drawn and solid drawn pairs of profiles.
- Intermediate reveals from top to bottom are 20, 15, and 10mm.
- At ground level and in public areas, the panels can be given a rigid backing to provide additional impact resistance.
- Standard joint centres width - 300mm with 1mm thick elZinc®.

1. elZinc® cladding
2. elZinc® weathering strip
3. elZinc® corner profile
4. elZinc® retaining strip
5. elZinc® perforated strip / perforated panel
6. Structural underlay
7. Insulation
8. Metal rail
9. Wall bracket
10. Folded galvanised sheet
11. Membrane
12. Structure

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZinc® cladding systems. It is the responsibility of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-elZinc® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document

All rights reserved with regard to this document. Non authorised use will be prosecuted



elZinc®
Tel. +34 984 116 332
Fax. +34 985 493 202
www.elzinc.es

Asturiana de Laminados S.A.
Pol. Ind. de Olloniego, Parcela C1
33660 Olloniego Asturias, Spain
elzinc@aslzinc.com