


FL 1.1.01 Flat lock shingle.

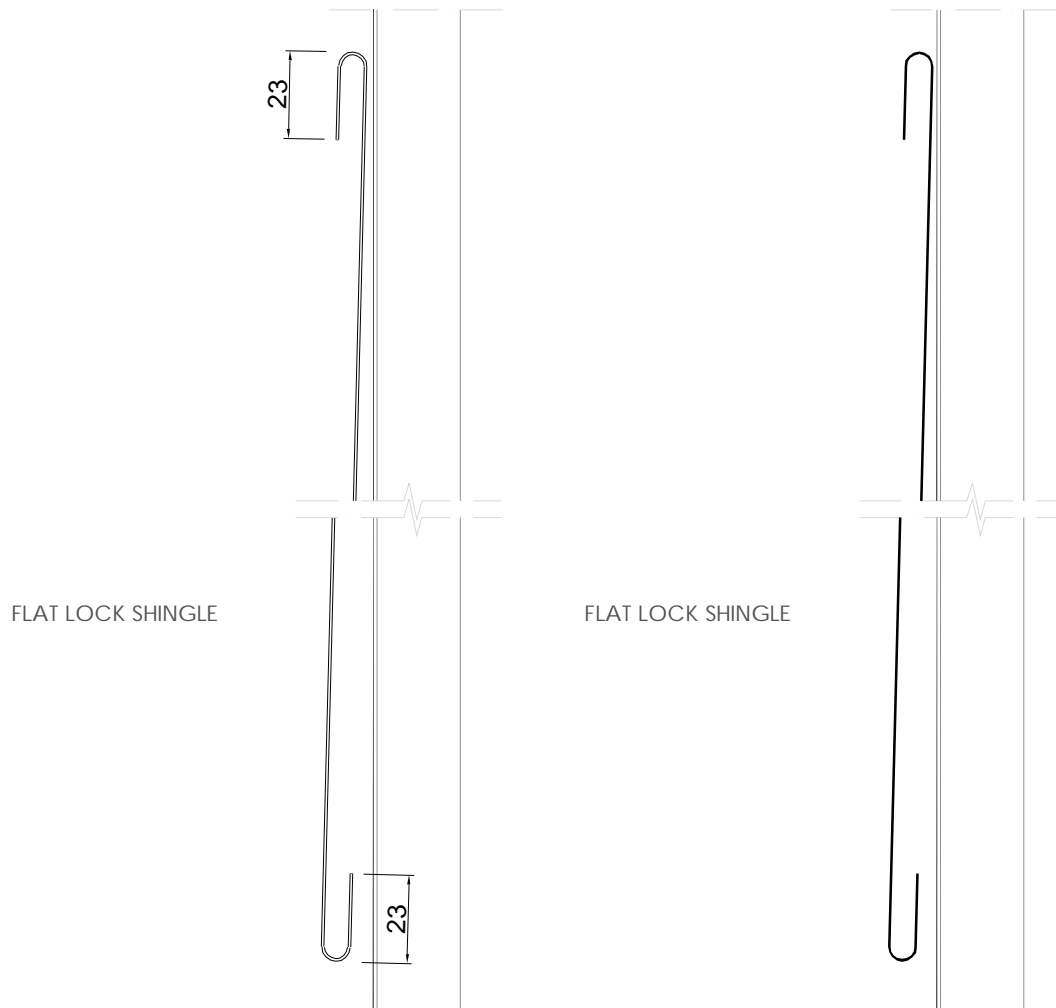

All dimensions are indicative unless specified on the drawing  
Sheet thickness may be exaggerated for clarity

Scale 1/2

Notes:

- Flat lock shingles with typical dimensions are shown. These fold widths cause approx. 70mm to be used in the joint, which coincides with that used in standing seam cladding, allowing both systems to line up if required. If this is not required, the system allows for slight changes according to each project's requirements.
- For joint dimensions of assembled shingles, see FL 1.1.02.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. Wooden batten
9. Wall bracket
10. Substrate