



## Traditional systems - Flat lock shingles

### FL 7.2.01 Vertical window section (Non-vented sill).



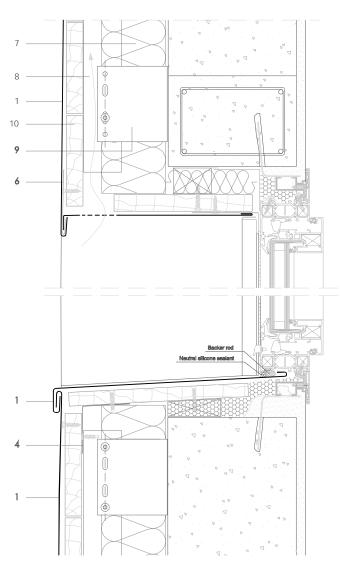

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

# Scale 1/5 Notes:

- Used for narrow windows where ventilation can flow around the window. For wide windows with an vented sill, see FL 7.1.01. y FL 7.1.02.
- The elevation corresponds to windows lined up with horizontal joints.
- For horizontal section see FL 7.2.02.
- Generic structural details are given for indicative purposes only.
- Window sections reproduced courtesy of Technal.

- 1. elZinc® cladding
- Membrane 2.
- Structural underlay 3.
- 4. Folded galvanised steel profiles

elZinc®


- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate






## Traditional systems - Flat lock shingles

### FL 7.2.01 Vertical window section (Non-vented sill).



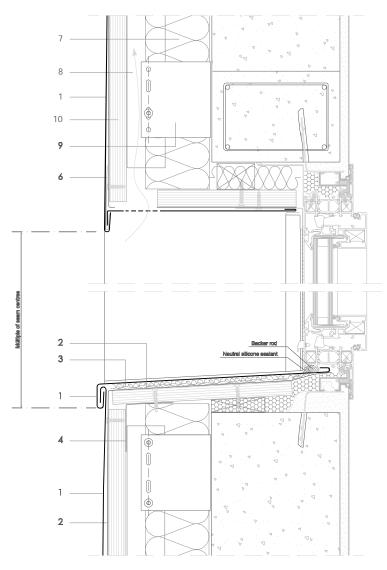

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

#### Scale 1/5

## Notes:

- Used for narrow windows where ventilation can flow around the window.
  For wide windows with an vented sill, see FL 7.1.01. y FL 7.1.02.
- The elevation corresponds to windows lined up with horizontal joints.
- For horizontal section see FL 7.2.02.
- Generic structural details are given for indicative purposes only.
- Window sections reproduced courtesy of Technal.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles

elZinc®

- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten

Tel. +34 984 116 332 Fax. +34 985 493 202

- 9. Wall bracket
- 10. Substrate

