


T R 4.1.04 Rear vented capping - rear 'T' plate.

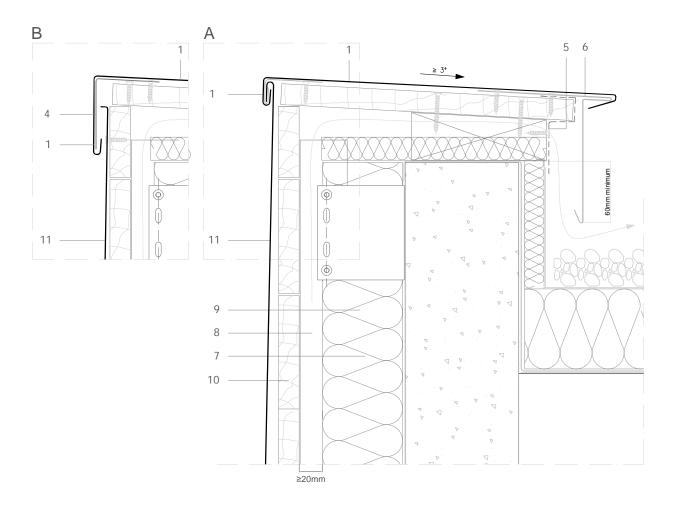

Scale 1/4

Notes:

- 'A' shows the wall capping hooked into the top row of the tiles to give a fine front edge to the cladding head.
- 'B' shows the wall capping lapped over the top row of tile.
- Wall capping front face in 'B' can be sized to match other elements of the façade such as corner pieces, window surrounds etc.
- See T R 4.1.01, 4.1.02 and 4.1.03 for alternative capping details.
- Generic structural details given for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate
- 11. elZinc® Rhomboid Tile

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building contractor and installer in a installation of el/Linc® clading systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-el/Lind® (elects any responsability due to direct or indirect damage that may arise from the use of the information contained in this document

All rights reserved with regard to this document. Non authorised use will be prosecute




elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com

Sheet thickness may be exaggerated for



T R 4.1.04 Rear vented capping - rear 'T' plate.

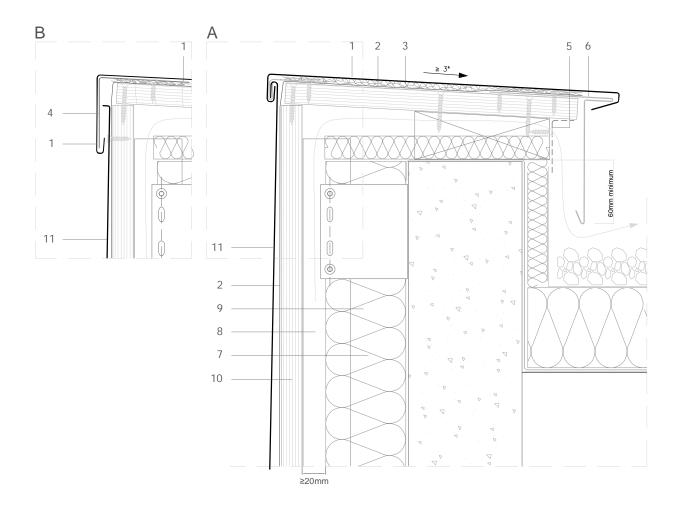

Scale 1/4

Notes:

- 'A' shows the wall capping hooked into the top row of the tiles to give a • fine front edge to the cladding head.
- 'B' shows the wall capping lapped over the top row of tile. •
- Wall capping front face in 'B' can be sized to match other elements of the • façade such as corner pieces, window surrounds etc.
- See T R 4.1.01, 4.1.02 and 4.1.03 for alternative capping details. •
- Generic structural details given for indicative purposes only. •

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 9. Wall bracket
- 10. Substrate
- 11. elZinc® Rhomboid Tile

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of eIZne® cladding systems. It is the responsable the archited, building contractor and installer in any case to ensure the validity of the specific details employed on each project. AsB-eIZne® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document. ility of

Non authorised use will be All rights re d with recard to this document.



elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten