


T R 7.1.01 Vertical window section (Vented sill).

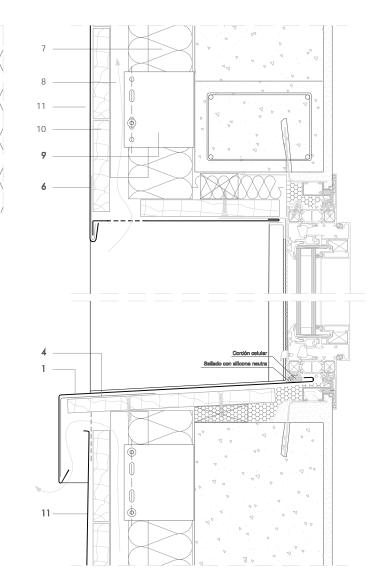

Scale 1/5

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

Notes:

- Used for wide windows with a vented sill. For narrow windows with an • un-vented sill, see TR 7.2.01. y TR 7.2.02.
- For horizontal section see TR 7.1.02.
- It is recommended to overlap the cladding with the sill by a minimum of • 60mm.
- Generic structural details are given for indicative purposes only. •
- Window sections reproduced courtesy of Technal.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate
- 11. elZinc® Rhomboid Tile

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with three intention of assisting building professionals in regard to the installation of eIZne® dadding systems. It is the responsable the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-eIZne® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document.


All rights rese twith recent of this document Non sutborised u



elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com



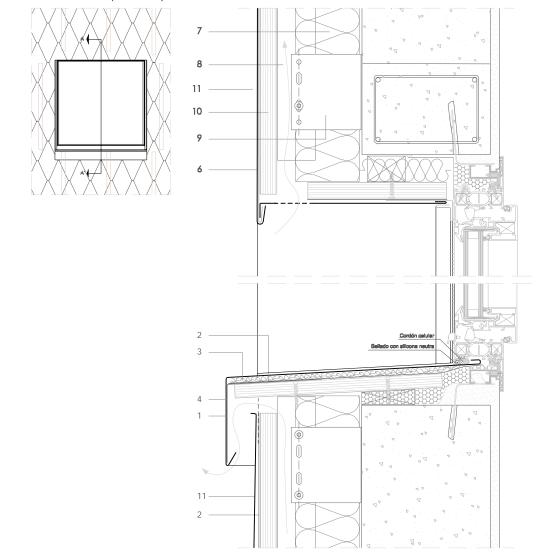

T R 7.1.01 Vertical window section (Vented sill).

Scale 1/5

Notes:

- Used for wide windows with a vented sill. For narrow windows with an • un-vented sill, see TR 7.2.01. y TR 7.2.02.
- For horizontal section see TR 7.1.02.
- It is recommended to overlap the cladding with the sill by a minimum of ٠ 60mm.
- Generic structural details are given for indicative purposes only.
- Window sections reproduced courtesy of Technal.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate
- 11. elZinc® Rhomboid Tile

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of eIZne® cladding systems. It is the responsable the archited, building contractor and installer in any case to ensure the validity of the specific details employed on each project. AsB-eIZne® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document. ility of

All rights or d with recard to this document. Non sutborised use



elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com