


# Traditional systems - Square Tile

## T S 4.1.03 Front vented capping - rear downstand.

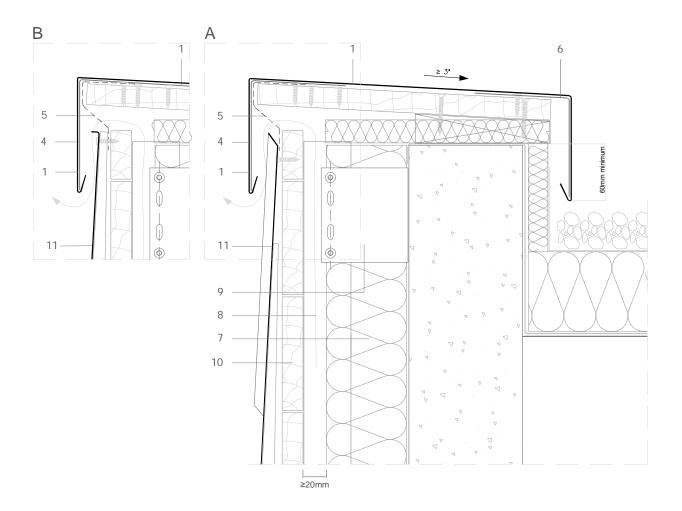

#### Scale 1/4

Notes:

- 'A' shows the tiles in the top row when they are left uncut.
- 'B' shows the tiles in the top row when they are cut to size folded over and fixed through new site-drilled holes.
- Wall capping front face can be sized to match other elements of the façade such as corner pieces, window surrounds etc.
- See T S 4.1.01 and 4.1.02 for alternative capping details.
- Generic structural details given for indicative purposes only.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate
- 11. elZinc® Square Tile

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing-has a purely informative function and been elaborated with the intention of assisting building protessionals in regard to the installation of #Zinc® cladding systems. It is the responsability of the architect, building contractor and installer in any case be ensure the validity of the specific dealla employed on each project. Asia-#Zinc® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document

All rights reserved with regard to this document. Non authorised use will be prosecute




elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity



# Traditional systems - Square Tile

### T S 4.1.03 Front vented capping - rear downstand.

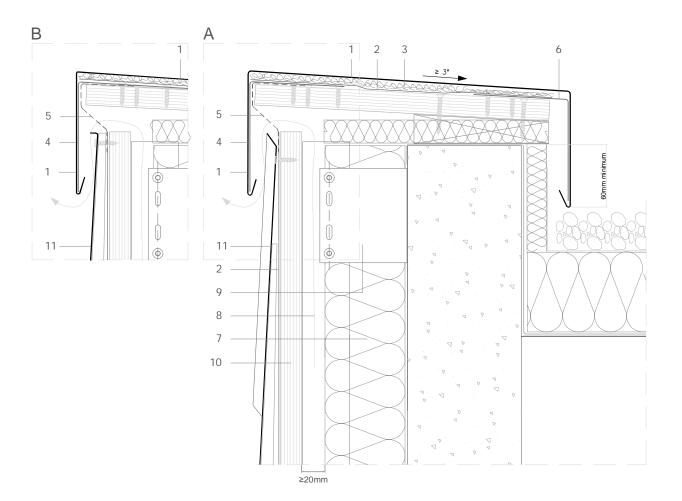

#### Scale 1/4

Notes:

- 'A' shows the tiles in the top row when they are left uncut.
- 'B' shows the tiles in the top row when they are cut to size folded over and fixed through new site-drilled holes.
- Wall capping front face can be sized to match other elements of the façade such as corner pieces, window surrounds etc.
- See T S 4.1.01 and 4.1.02 for alternative capping details.
- Generic structural details given for indicative purposes only.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. Wooden batten
- 9. Wall bracket
- 10. Substrate
- 11. elZinc® Square Tile

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing-has a purely informative function and been elaborated with the intention of assisting building portessionals in regard to the installation of elaCinc® clading systems. It is the responsability of the archite, building contractor and installer in any case to ensure the validity of the specific dealle employed on each project. Asia-elZinc® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document

All rights reserved with regard to this document. Non authorised use will be prosecute



elZinc® Tel. +34 984 116 332 Fax. +34 985 493 202 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Olloniego, Parcela C1 33660 Olloniego Asturias, Spain elzinc@aslazinc.com

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity