
DLSS 1.2.1.03 Curved foot.

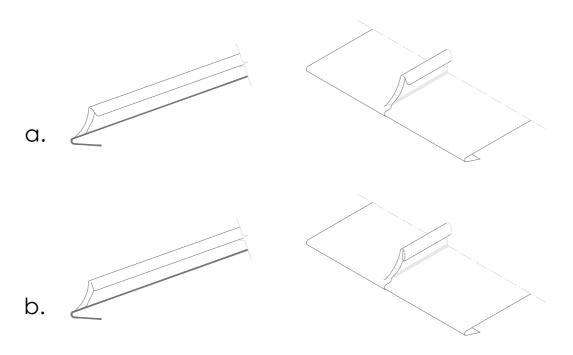

## Scale 1/4

## Notes:

- Decorative look but more labour intensive than other foot options.
- 'a' requires straightening of undercloak and overcloak before closing tab around front edge.
- Return fold around eaves strip should be left open

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZino® cladding systems. It is the response he architect, building contractor and installer in any case to ensure the validity of the specific details employed on eproject. Asla-elZino® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document



elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

All dimensions are indicative unless specified on the drawing

Sheet thickness may be exaggerated for clarity