


Traditional systems - Double lock standing seam

DLSS 1.2.1.05 Swabian foot.

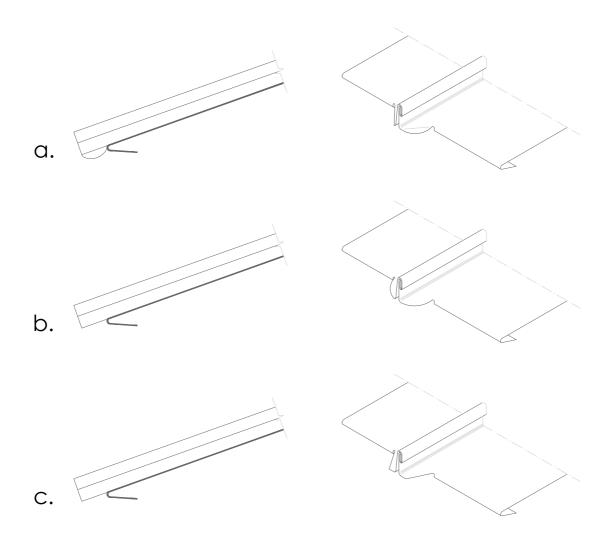

Scale 1/4

Notes:

- Easiest of all seam ends to form.
- Not to everyone's taste for free draining edges where its 'nose' is visible from below.
- Return fold around eaves strip should be left open

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS



All rights re ved with regard to t

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com