


DLSS 1.2.2.02b Preformed straight dog-eared upstand.

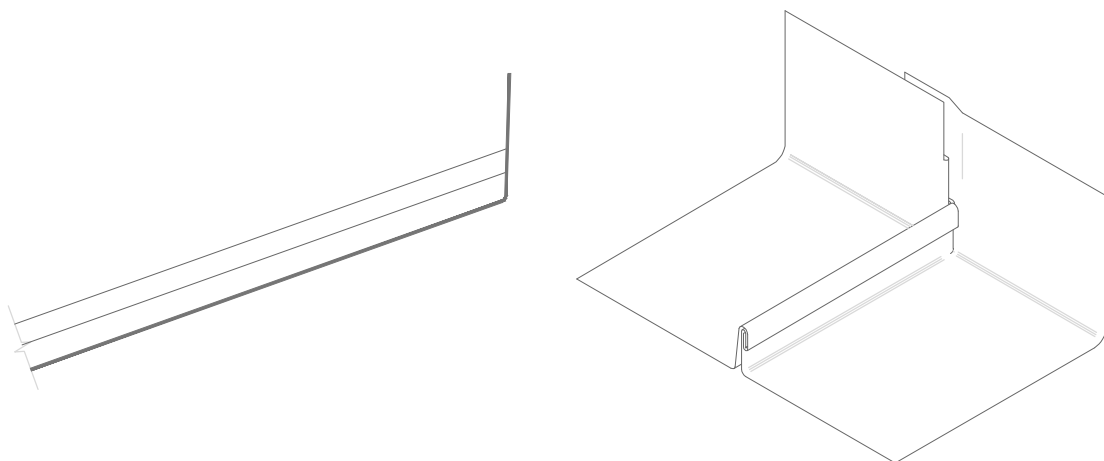

Scale 1/4

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Notes:

- Used for short upstands (batten ridge, batten hip, step etc.)
- Seam does not carry around back of detail so less weathertight than standard version (see DLSS 1.2.2.02)
- Generally limited to steeply pitched roofs.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate