


Traditional systems - Double lock standing seam.

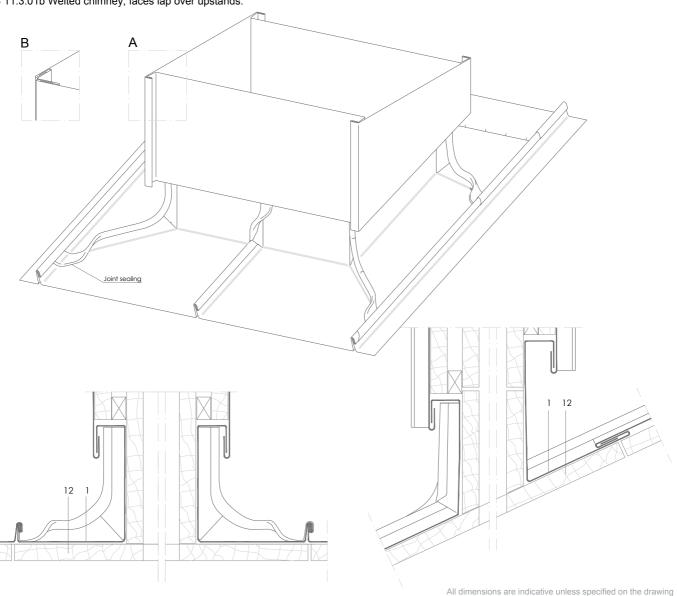

DLSS 11.3.01b Welted chimney, faces lap over upstands.

Scale 1/5

Notes:

- In this solution, the chimney walls are independent of the roofing sheet upstands, •
- 'A' shows the chimney wall corners finished in angle seams.
- 'B' shows the chimney wall corners finished in flat lock joints.
- See DLSS 11.3.01a for more details regarding the welted roofing sheets upstands
- The top detail depends on the type of chimney stack detail see DLSS 11.1.01 for an example.
- For chimneys wider than two bays it is recommended to incorporate a cricket in the back gutter to channel rainwater around the chimney.
- See DLSS 11.3.01c for an alternative solution to the chimney cladding.
- Generic structural details are shown for illustrative purposes only.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- Gutter clip 9.
- 10. Gutter bracket
- elZinc® clip 11.
- 12. Substrate

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

Sheet thickness may be exaggerated for clarity

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS


The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZino8 cladding systems. It is the responsabil the architect, building contractor and installer in any case to ensure the validing of the specific details employed on each project. Asla-elZino8 rejects any responsibility due to direct or indirect damage that may arise from the use of the information contanted in this document.

All rights reserved with regard to this docu Non auth

www.elzinc.es



Traditional systems - Double lock standing seam.

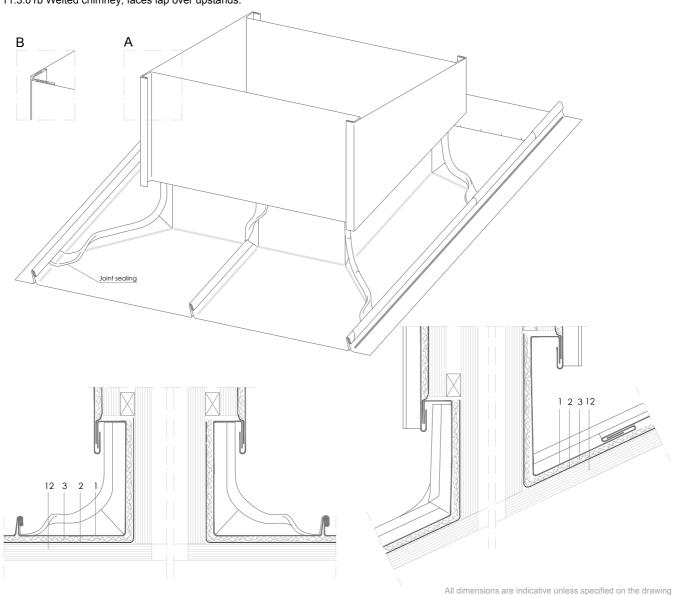

DLSS 11.3.01b Welted chimney, faces lap over upstands.

Scale 1/5

Notes:

- In this solution, the chimney walls are independent of the roofing sheet upstands, •
- 'A' shows the chimney wall corners finished in angle seams.
- 'B' shows the chimney wall corners finished in flat lock joints.
- See DLSS 11.3.01a for more details regarding the welted roofing sheets upstands
- The top detail depends on the type of chimney stack detail see DLSS 11.1.01 for an example.
- For chimneys wider than two bays it is recommended to incorporate a cricket in the back gutter to channel rainwater around the chimney.
- See DLSS 11.3.01c for an alternative solution to the chimney cladding.
- Generic structural details are shown for illustrative purposes only.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- Gutter clip 9.
- 10. Gutter bracket
- elZinc® clip 11.
- 12. Substrate

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

Sheet thickness may be exaggerated for clarity

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZin80 cladding systems. It is the responsabil the architect, building contractor and installer in any case to ensure the validing of the specific details employed on each project. Asla-elZin80 rejects any responsibility due to direct or indirect damage that may arise from the use of the information contanted in this document.

All rights reserved with regard to this docu Non auth

