


DLSS 12.2.01 Skylight, sections.

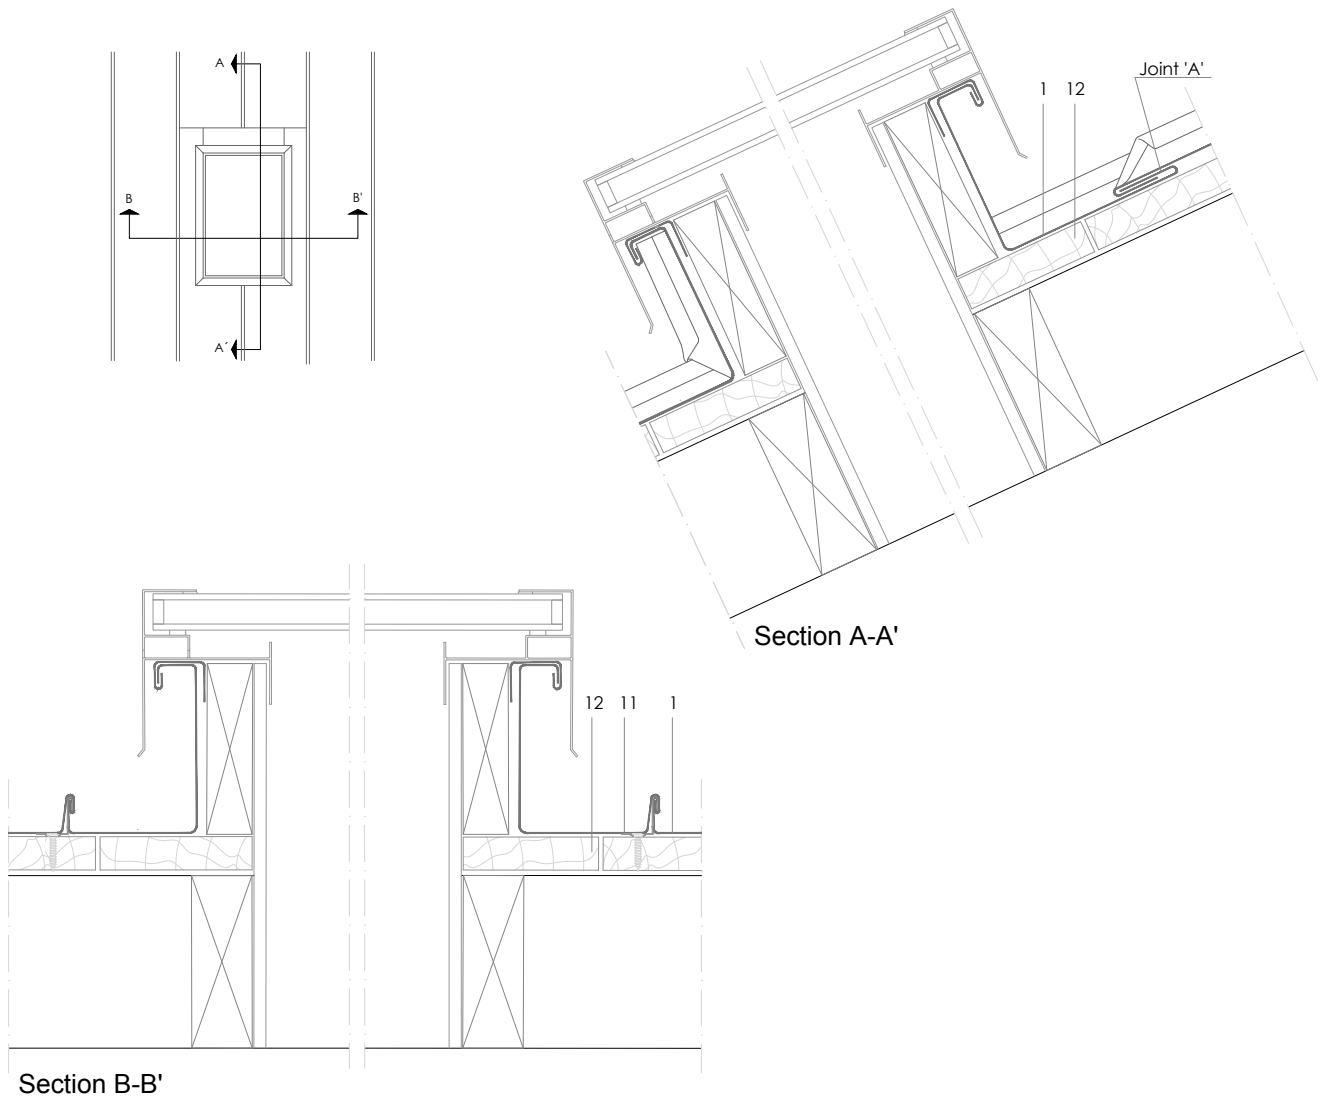

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity


Scale 1/5

Notes:

- For skylights wider than two bays it is recommended to incorporate a cricket in the back gutter to channel rainwater around the skylight.
- See DLSS 12.3.01, 12.1.02 and 12.4.01 for greater detail of the roofing sheet upstands.
- Generic details of the window frame and structure are shown for illustrative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate

DLSS 12.2.01 Skylight, sections.

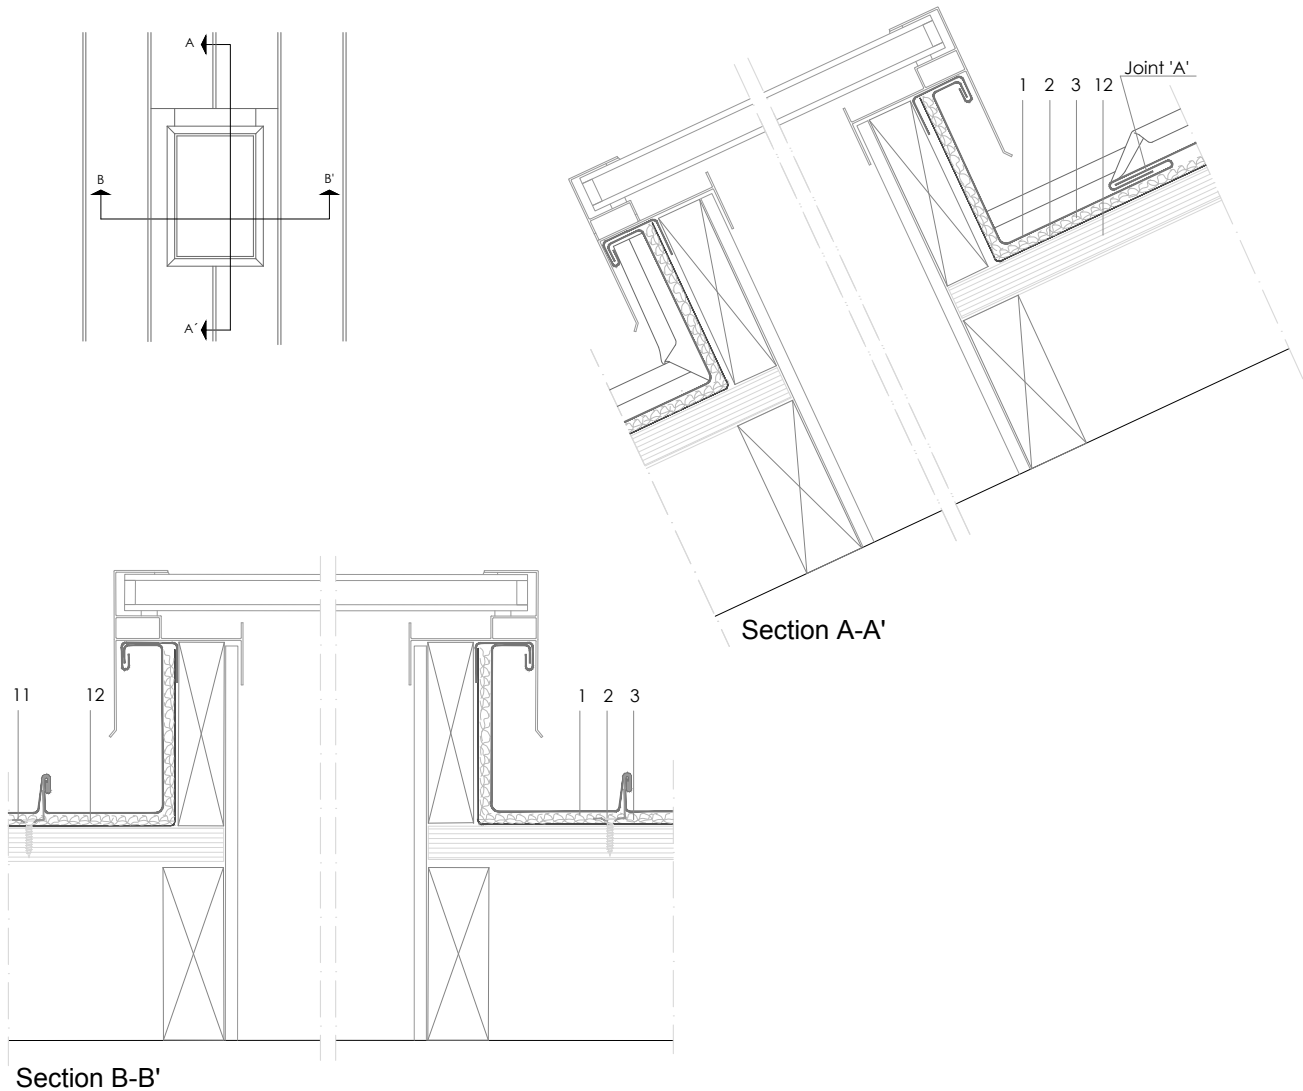

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Scale 1/5

Notes:

- For skylights wider than two bays it is recommended to incorporate a cricket in the back gutter to channel rainwater around the skylight.
- See DLSS 12.3.01, 12.1.02 and 12.4.01 for greater detail of the roofing sheet upstands.
- Generic details of the window frame and structure are shown for illustrative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate