


DLSS 2.2.02 Lap lock joint - discontinuous seam.

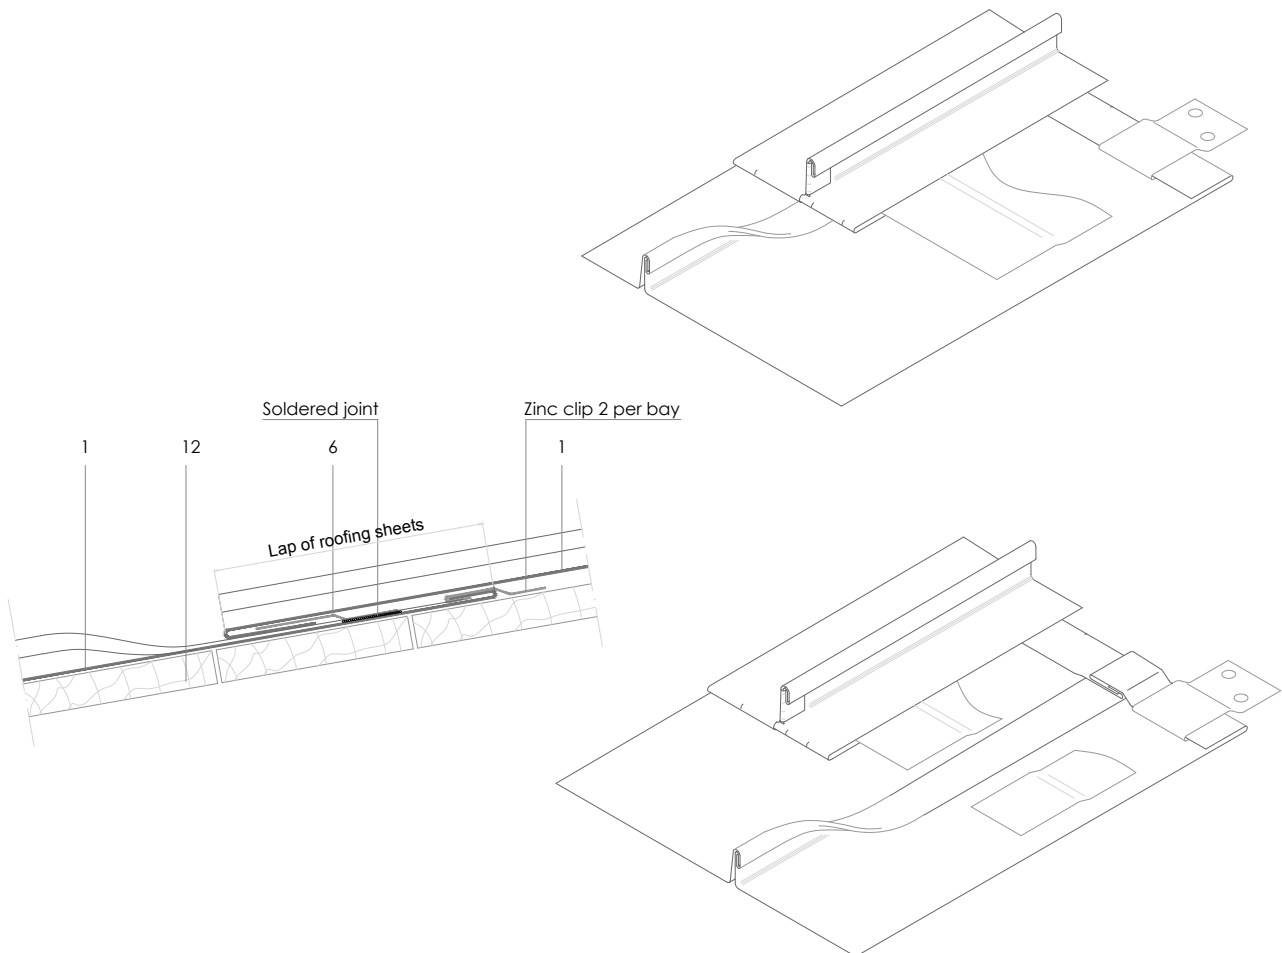

All dimensions are indicative unless specified on the drawing  
Sheet thickness may be exaggerated for clarity


Scale 1/5

Notes:

- This joint can be used as an expansion joint.
- Minimum recommended pitch: 10°.
- Lap of sheets according to local or national regulations. In their absence, a minimum of 180mm is recommended.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate

DLSS 2.2.02 Lap lock joint - discontinuous seam.

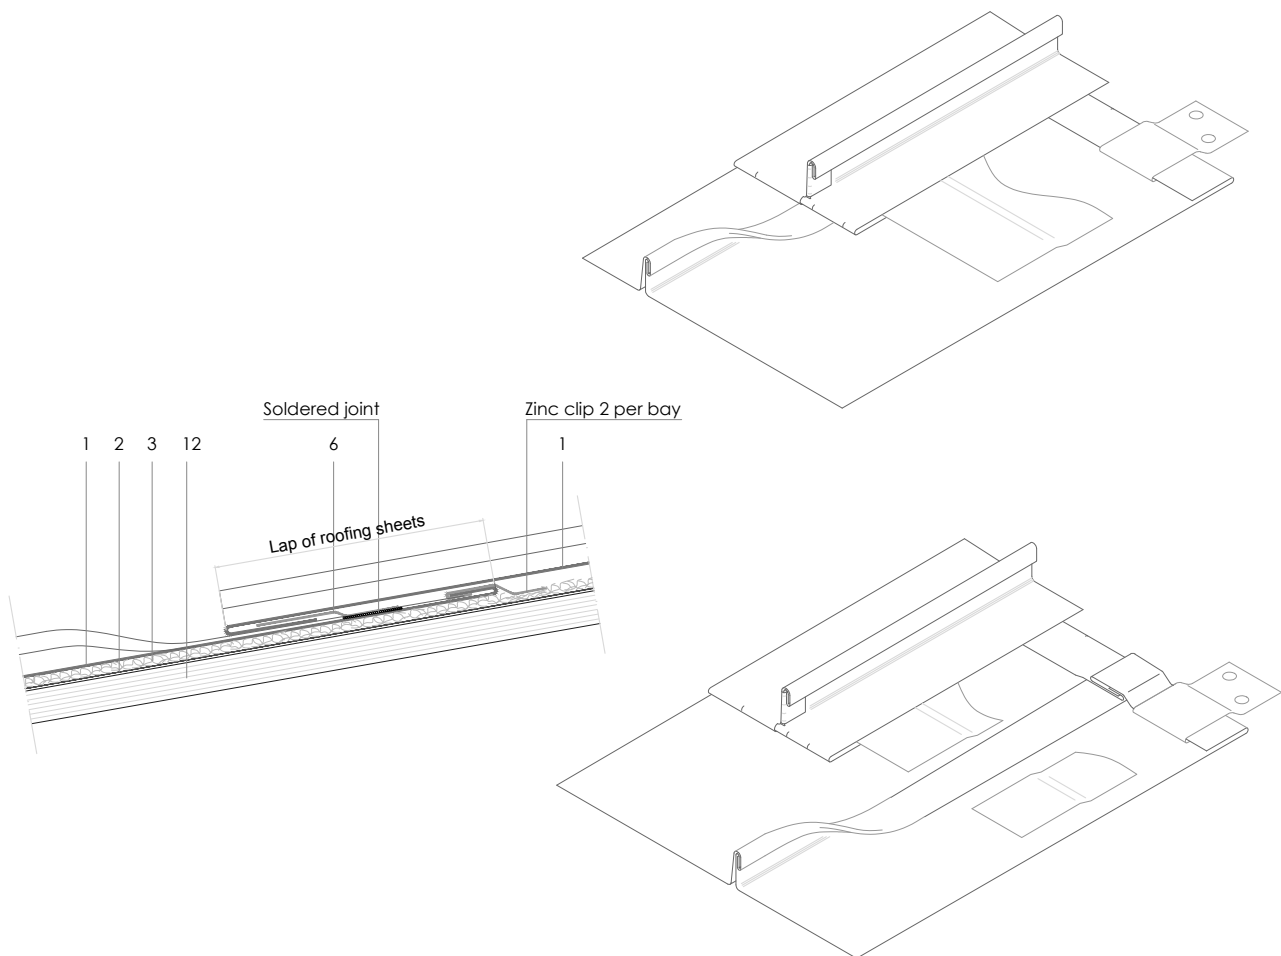

All dimensions are indicative unless specified on the drawing  
Sheet thickness may be exaggerated for clarity

Scale 1/5

Notes:

- This joint can be used as an expansion joint.
- Minimum recommended pitch: 10°.
- Lap of sheets according to local or national regulations. In their absence, a minimum of 180mm is recommended.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate