


DLSS 1.2.1.01 a. Square foot b. Square foot with weather check c. Soldered square foot

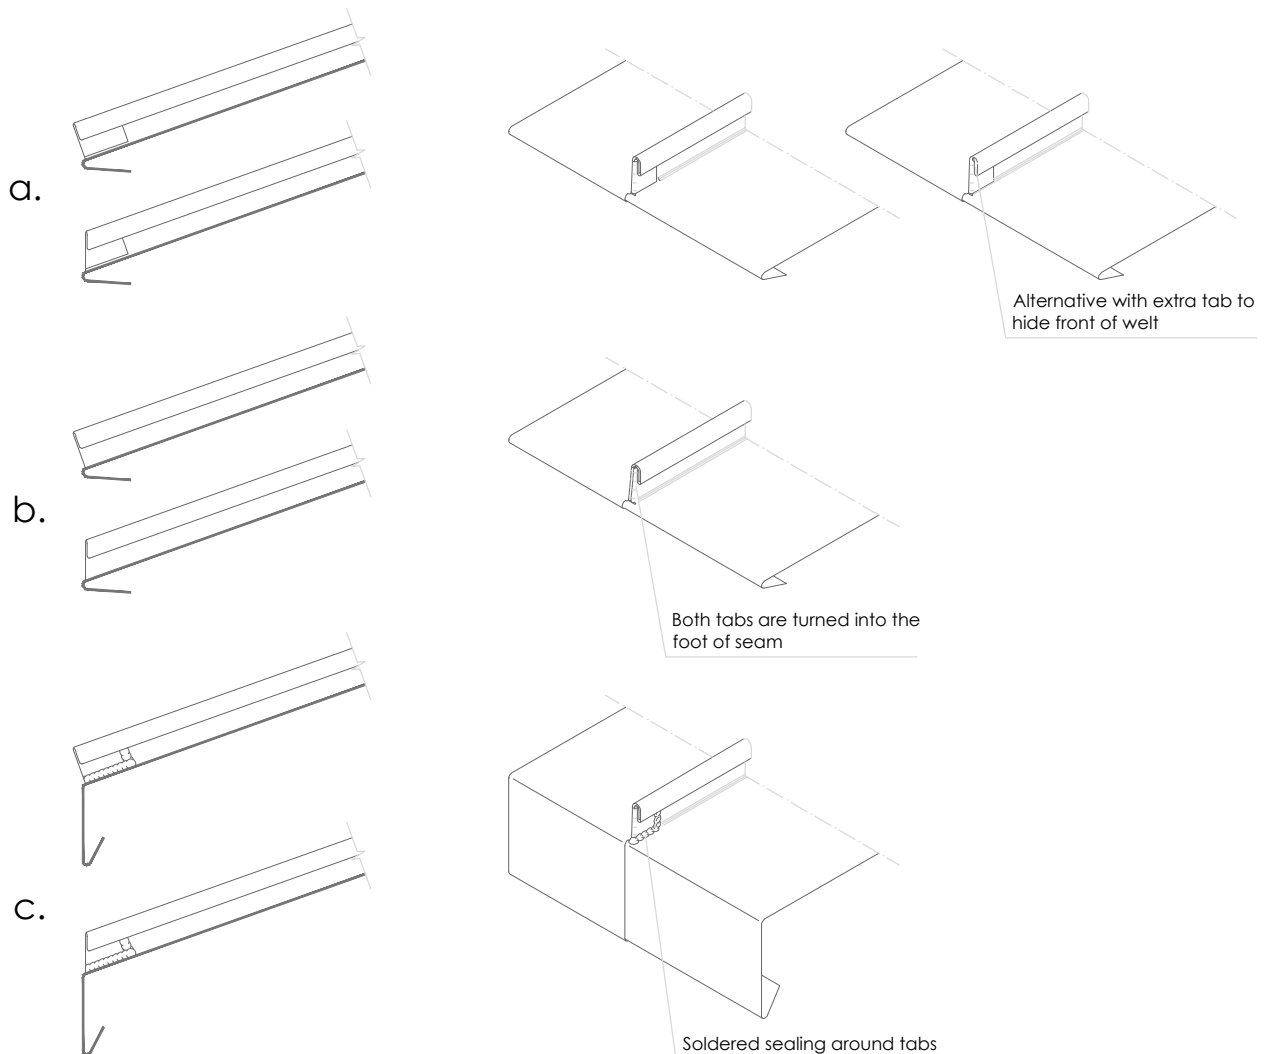

Scale 1/5

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Notes:

- Front edges of all seam endings can be set perpendicular to roof pitch or vertically.
- 'a' most commonly used.
- 'b' is suitable for cold climate regions susceptible to snow and ice build-up
- 'c' only practical with elZinc® Natural.
- Return fold around eaves strip should be left open.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate