


Traditional systems - Double lock standing seam

DLSS 3.2.1.05 Half round eaves gutter (over wooden fascia and zinc soffit).

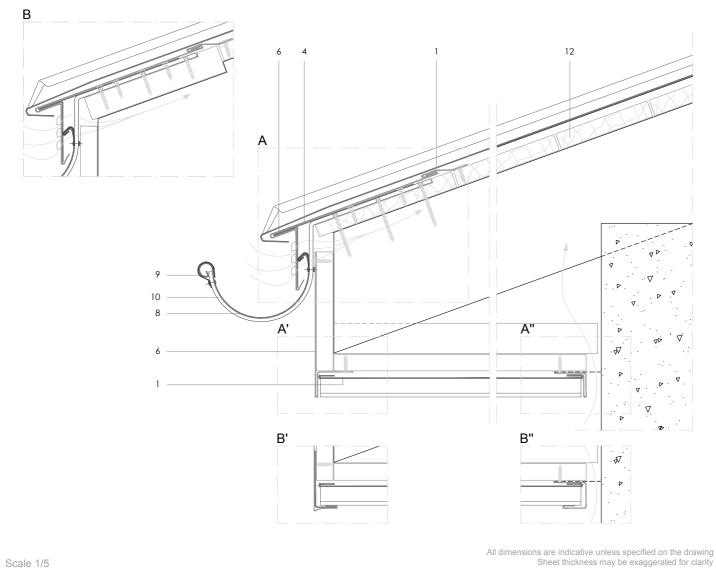

scale 1/

Notes:

- Foot of seam shown finished according to DLSS 1.2.1.02a. See DLSS 1.2.1.02b to 1.2.1.05c for alternatives.
- 'A' shows gutter brackets rebated into substrate, fixed through to rafters. As a consequence, brackets will not line up with standing seams.
- 'B' shows gutter brackets rebated into and fixed to continuous thicker eaves board enabling brackets to line up with standing seams if desired.
- A box section gutter profile can be used as an alternative to half round.
- A' A" and B' B" show visual alternatives of treating the edges of the standing seam soffit.
- Outline structural details are shown for indicative purposes only.

1. elZinc® cladding

- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- elZinc® clip
 Substrate

elZinc®

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document/drawing-has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZinc® cladding systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asia-elZinc® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document




eizinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es 01



Traditional systems - Double lock standing seam

DLSS 3.2.1.05 Half round eaves gutter (over wooden fascia and zinc soffit).

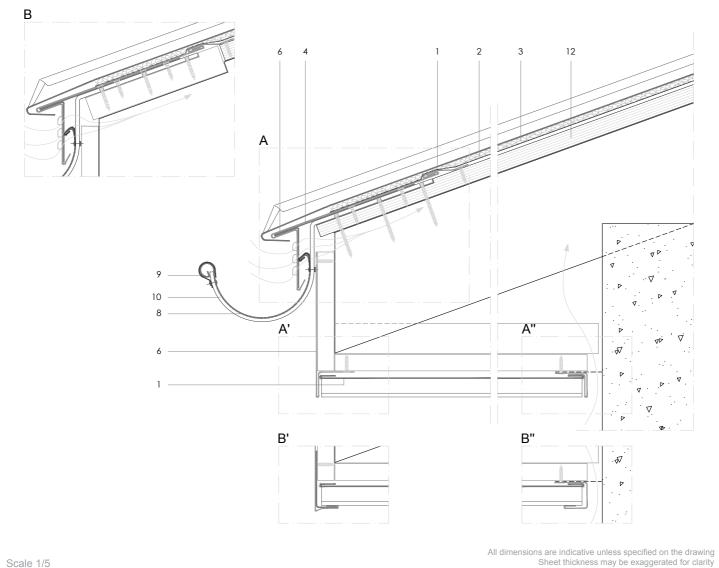

Scale 1/

Notes:

- Foot of seam shown finished according to DLSS 1.2.1.02a. See DLSS 1.2.1.02b to 1.2.1.05c for alternatives.
- 'A' shows gutter brackets rebated into substrate, fixed through to rafters. As a consequence, brackets will not line up with standing seams.
- 'B' shows gutter brackets rebated into and fixed to continuous thicker eaves board enabling brackets to line up with standing seams if desired.
- A box section gutter profile can be used as an alternative to half round.
- A' A" and B' B" show visual alternatives of treating the edges of the standing seam soffit.
- Outline structural details are shown for indicative purposes only.

1. elZinc® cladding

- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing-has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of el2/no2 cladding systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-et/21no2 rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document



01