


Traditional systems - Double lock standing seam

DLSS 4.1.05 Overlapped ventilated ridge.

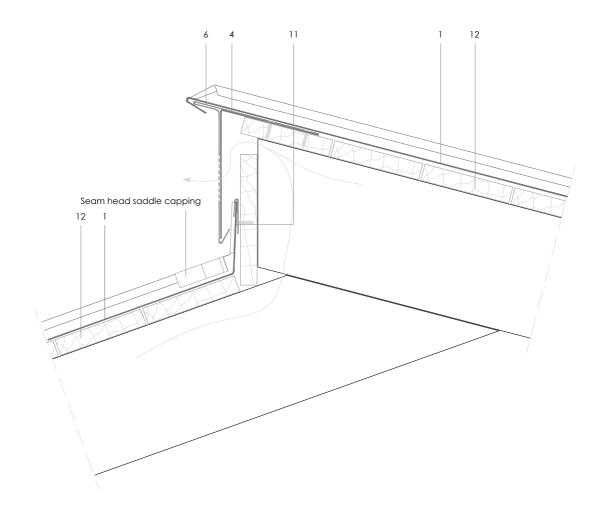

## Scale 1/5

Notes:

- Head of seam shown finished according to DLSS 1.2.2.03b. Alternatives: . Turned down seam DLSS 1.2.2.01 and pinched seam DLSS 1.2.2.03a.
- Outline structural details are shown for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with the interation of assisting building professionals in regard to the installation of eZnc6 cladding systems. It is the responsability of the architet, building contractor and installer in any case to ensure the validly of the specific details employed on each project. Asla-eZInc6 rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document.




elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com



Traditional systems - Double lock standing seam

DLSS 4.1.05 Overlapped ventilated ridge.

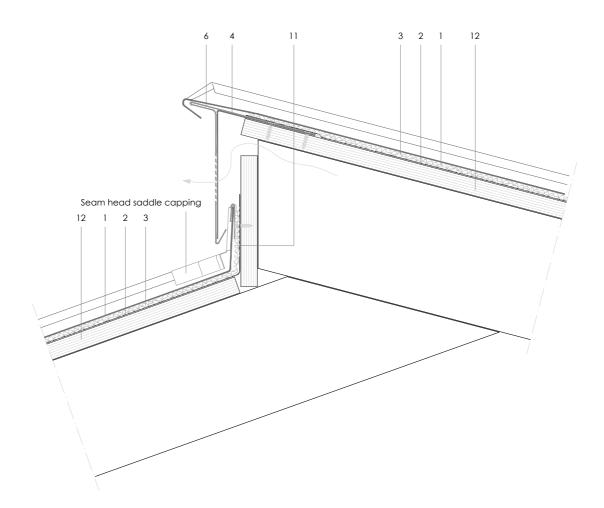

## Scale 1/5

Notes:

- Head of seam shown finished according to DLSS 1.2.2.03b. Alternatives: Turned down seam DLSS 1.2.2.01 and pinched seam DLSS 1.2.2.03a.
- Outline structural details are shown for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contained in this document-drawing- has a purely informative function and been elaborated with the intertition of assisting building portectsionals in regard to the installation of elZind® cladding systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-elZind® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document



elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

01