


Traditional systems - Double lock standing seam

DLSS 4.2.01 Square batten ridge.

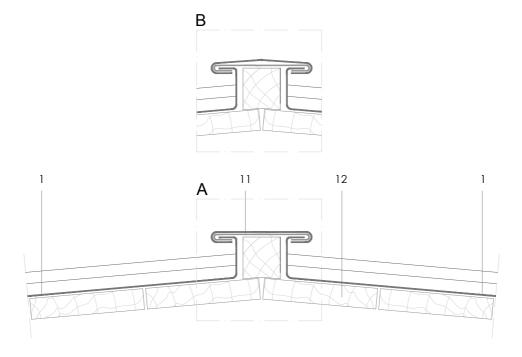

Scale 1/4

Notes:

- Used on non-vented roofs, cross-vented roofs or roofs using ventilation
- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: turned down upstand DLSS 1.2.2.01.
- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip



12. Substrate


All dimensions are indicative unless specified on the drawing

Sheet thickness may be exaggerated for clarity



Traditional systems - Double lock standing seam

DLSS 4.2.01 Square batten ridge.

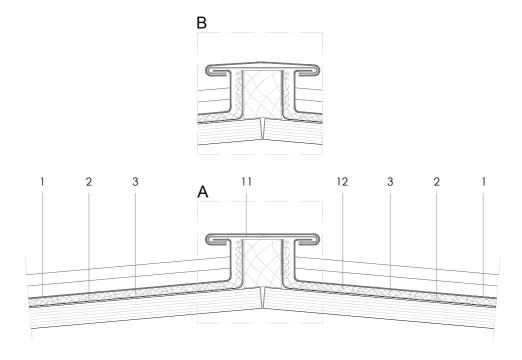

Scale 1/4

Notes:

- Used on non-vented roofs, cross-vented roofs or roofs using ventilation
- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: turned down upstand DLSS 1.2.2.01.
- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip



12. Substrate

All dimensions are indicative unless specified on the drawing

Sheet thickness may be exaggerated for clarity