


DLSS 4.3.03 Vented mono pitch ridge (with zinc flat lock fascia).

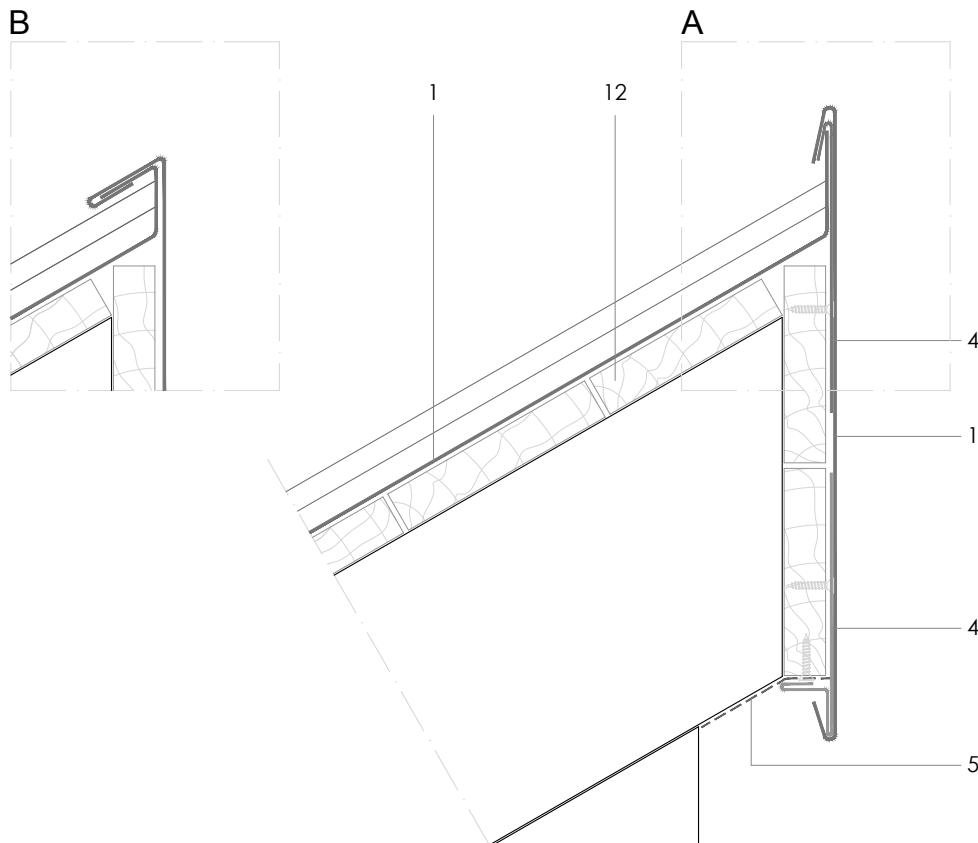

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity


Scale 1/4

Notes:

- Head of seam shown finished according to DLSS 1.2.2.02a.
- 'B' gives a straighter line along the ridge, and allows seam head to be finished using 1.2.2.02b if roof of sufficient pitch.
- Outline structural details are shown for indicative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate

DLSS 4.3.03 Vented mono pitch ridge (with zinc flat lock fascia).

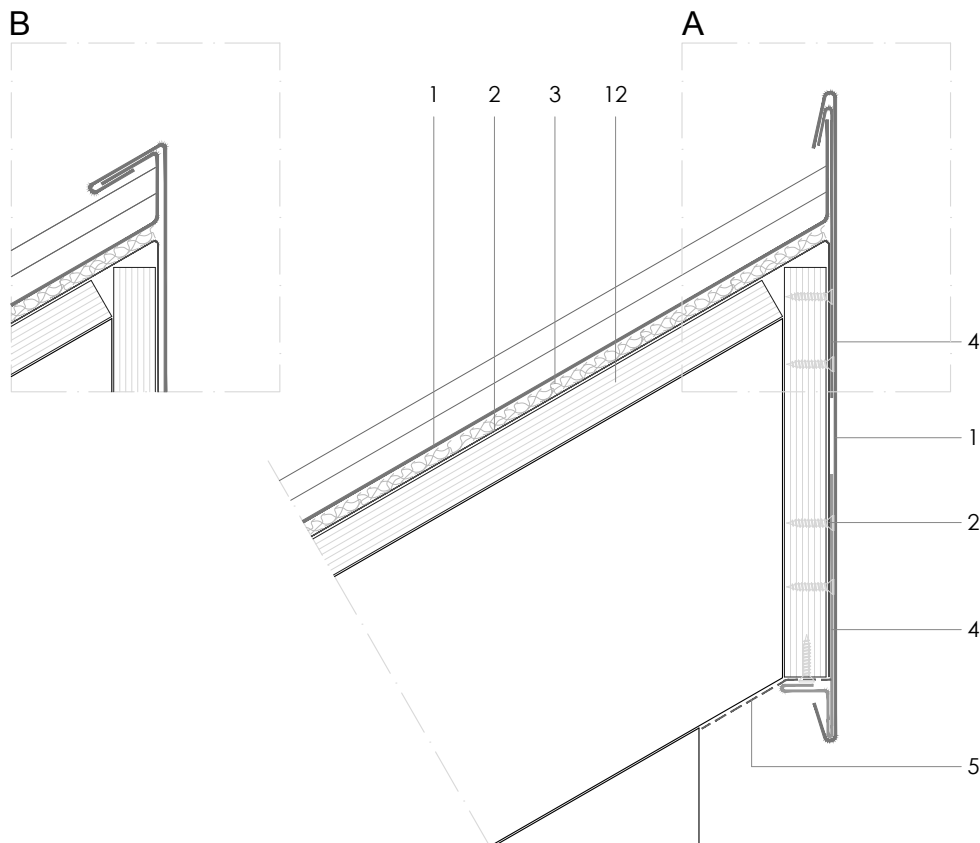

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Scale 1/4

Notes:

- Head of seam shown finished according to DLSS 1.2.2.02a.
- 'B' gives a straighter line along the ridge, and allows seam head to be finished using 1.2.2.02b if roof of sufficient pitch.
- Outline structural details are shown for indicative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate