


DLSS 6.2.02 Unvented abutment to brick wall (straight dog-eared upstand).

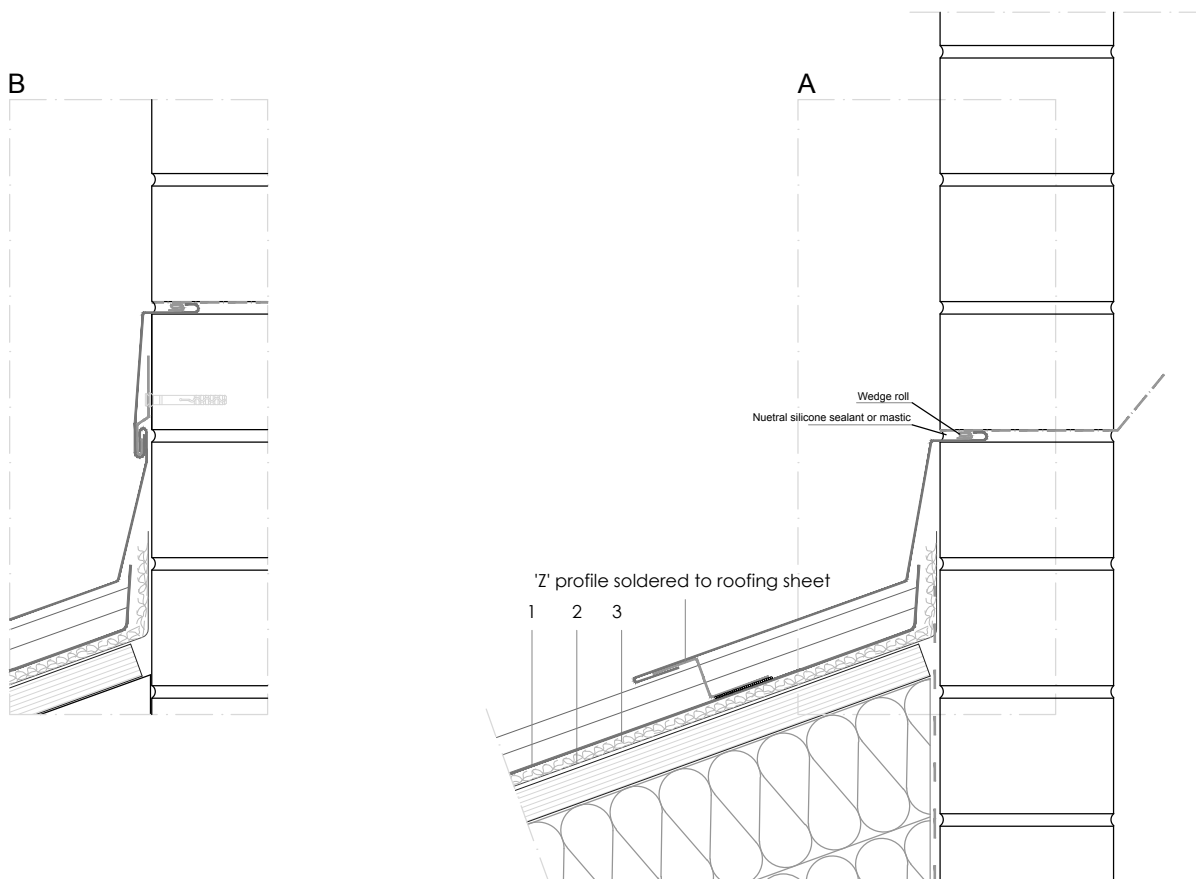

Scale 1/5

All dimensions are indicative unless specified on the drawing  
Sheet thickness may be exaggerated for clarity

Notes:

- This detail gives a slender upstand, which is formed using the straight dog-eared upstand DLSS 1.2.2.02a. Alternative: DLSS 1.2.2.02b if pitch steep enough.
- 'A' shows upstand apron split in two pieces to allow longer pieces to be used for the lower part.
- 'B' shows apron in one piece if lengths at or below 2mts.
- Use zinc compatible sealants. Consult elZinc for more details.
- Outline structural details are given for indicative purposes only.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate