


DLSS 7.1.01 Valley gutter (Single lock welded to roof).

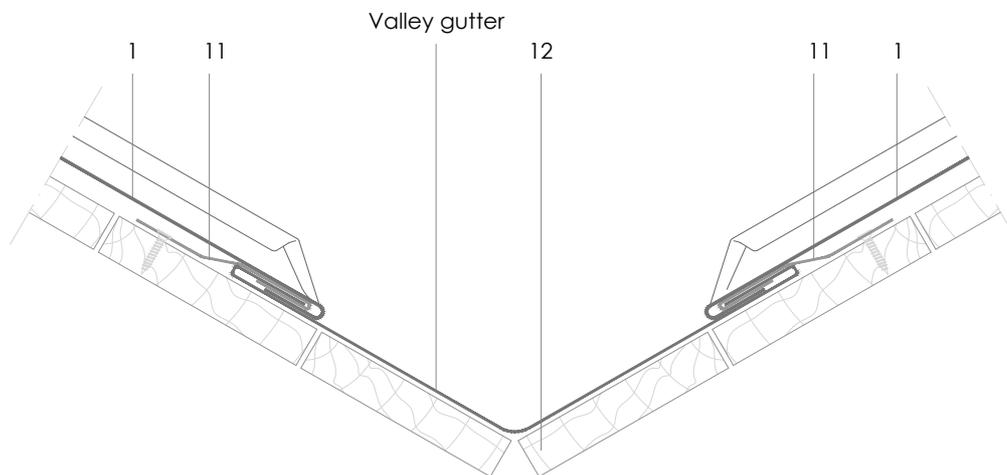

Scale 1/4


All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Notes:

- For roofs pitched at 25° and above, on both sides of valley.

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate

DLSS 7.1.01 Valley gutter (Single lock welded to roof).

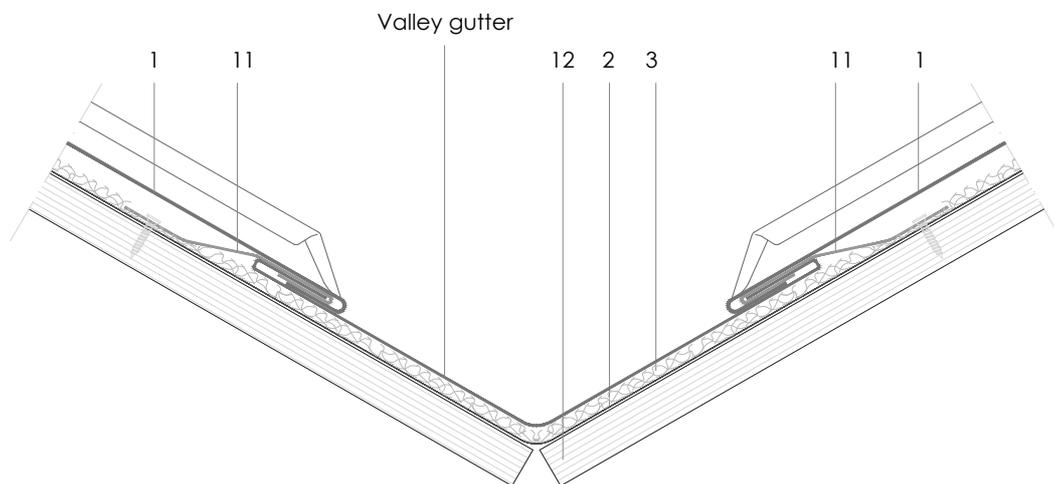

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Scale 1/4

Notes:

- For roofs pitched at 25° and above, on both sides of valley

1. elZinc® cladding
2. Membrane
3. Structural underlay
4. Folded galvanised steel profiles
5. elZinc® perforated sheet
6. elZinc® retention profile
7. Insulation
8. elZinc® hung gutter
9. Gutter clip
10. Gutter bracket
11. elZinc® clip
12. Substrate