


# Traditional systems - Double lock standing seam

### DLSS 7.3.01 Boxed valley gutters.

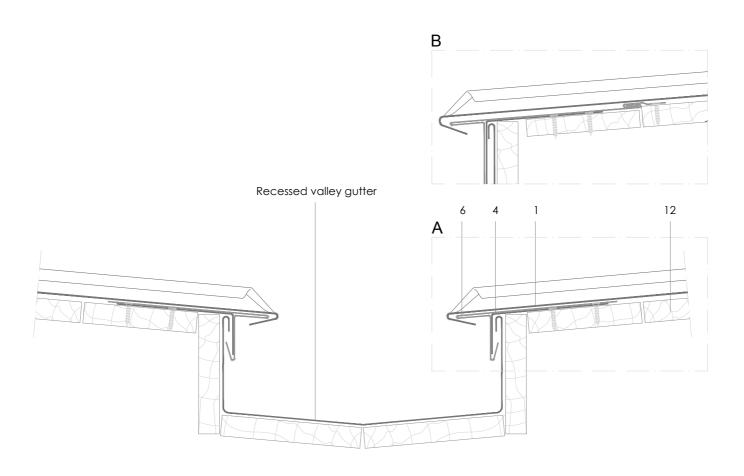

### Scale 1/4

#### Notes:

- For roofs pitched at 3° and above on both sides of valley.
- The form of this valley gutter must be taken into account when designing the roof build-up in this area.
- The gutter should fit loosely in the substrate to ensure free thermal movement.
- 'A' shows typical detail.
- 'B' shows alternative with capilliary break for exposed roofs.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate




All dimensions are indicative unless specified on the drawing

Sheet thickness may be exaggerated for clarity



# Traditional systems - Double lock standing seam

# DLSS 7.3.01 Boxed valley gutters.

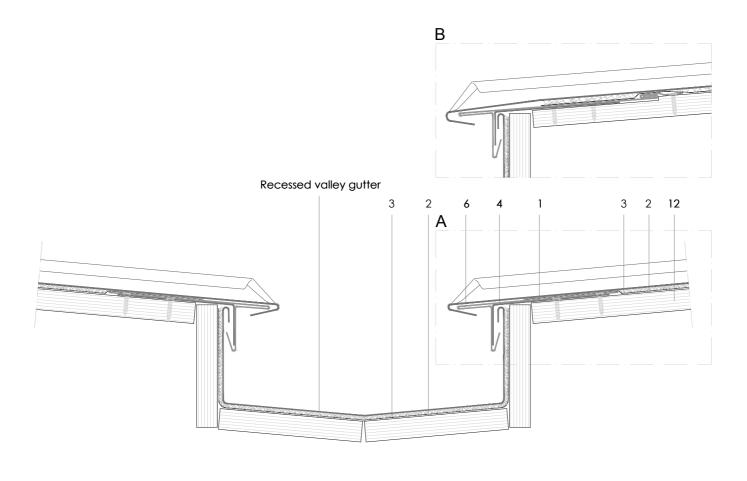

### Scale 1/4

#### Notes:

- For roofs pitched at 3° and above on both sides of valley.
- The form of this valley gutter must be taken into account when designing the roof build-up in this area.
- The gutter should fit loosely in the substrate to ensure free thermal movement.
- 'A' shows typical detail.
- 'B' shows alternative with capilliary break for exposed roofs.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate



All dimensions are indicative unless specified on the drawing

Sheet thickness may be exaggerated for clarity