



Traditional systems - Double lock standing seam

DLSS 17.1.02. Circular fall arrest post fixed through cladding

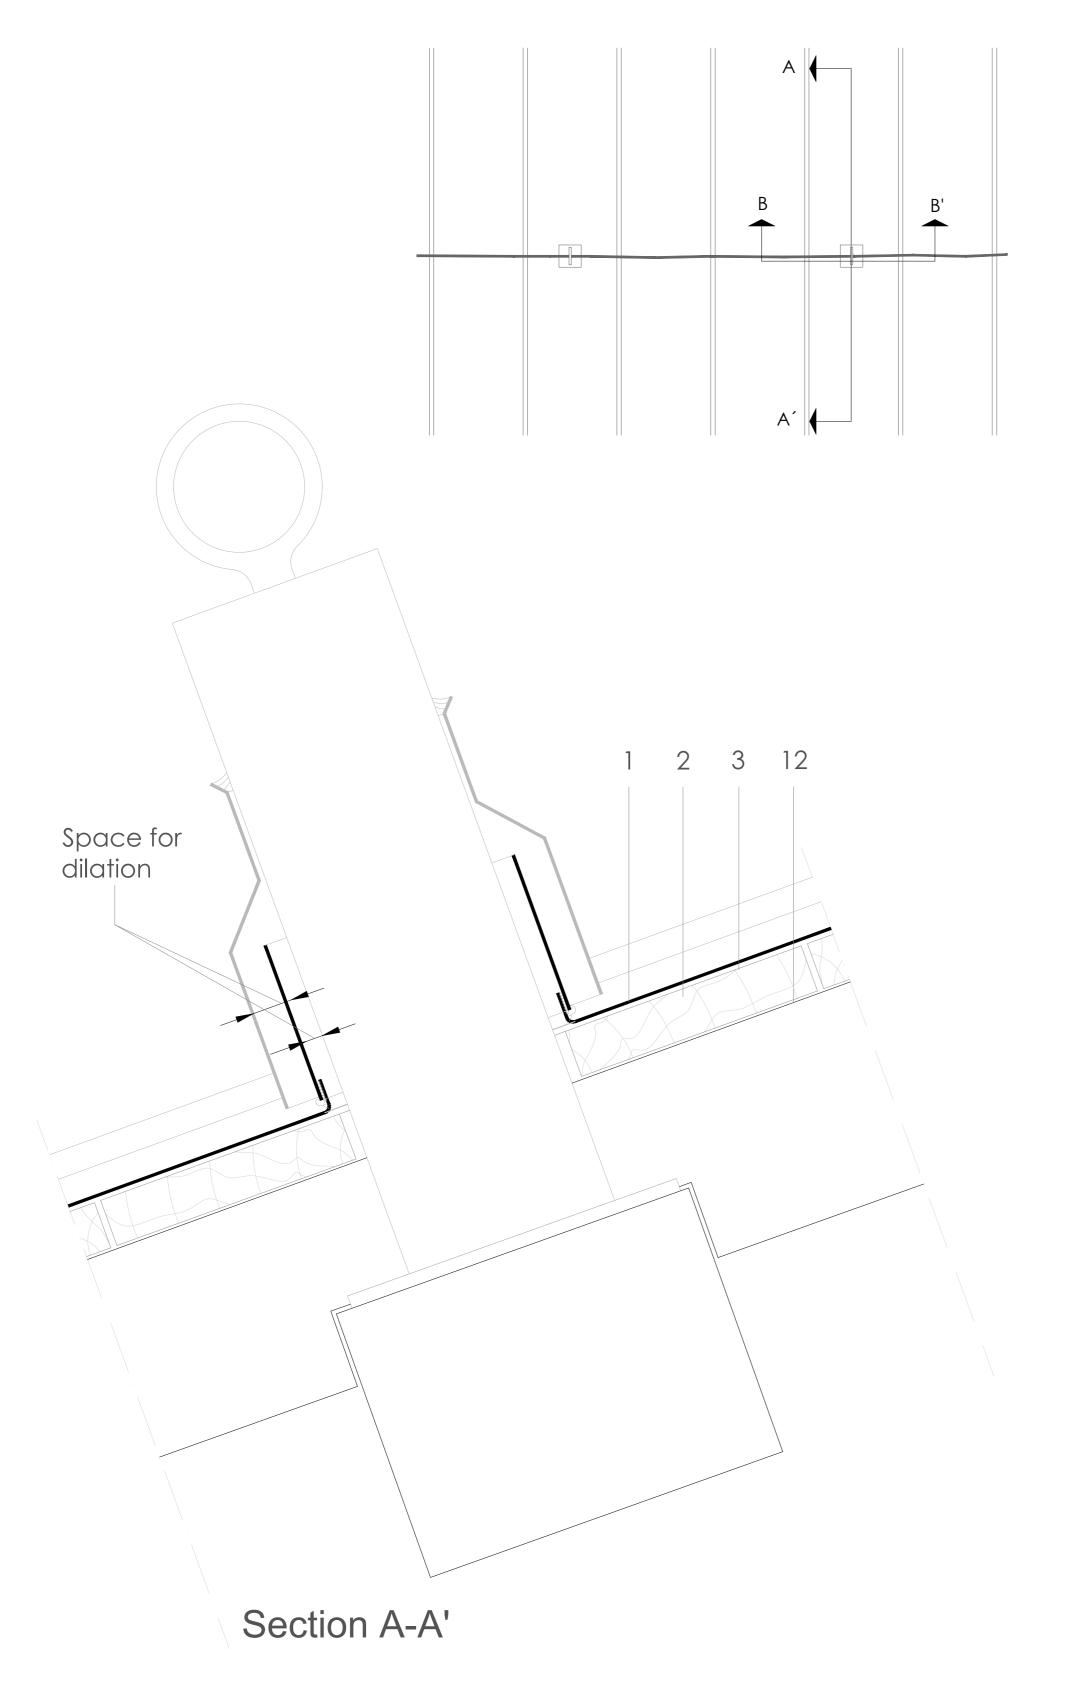

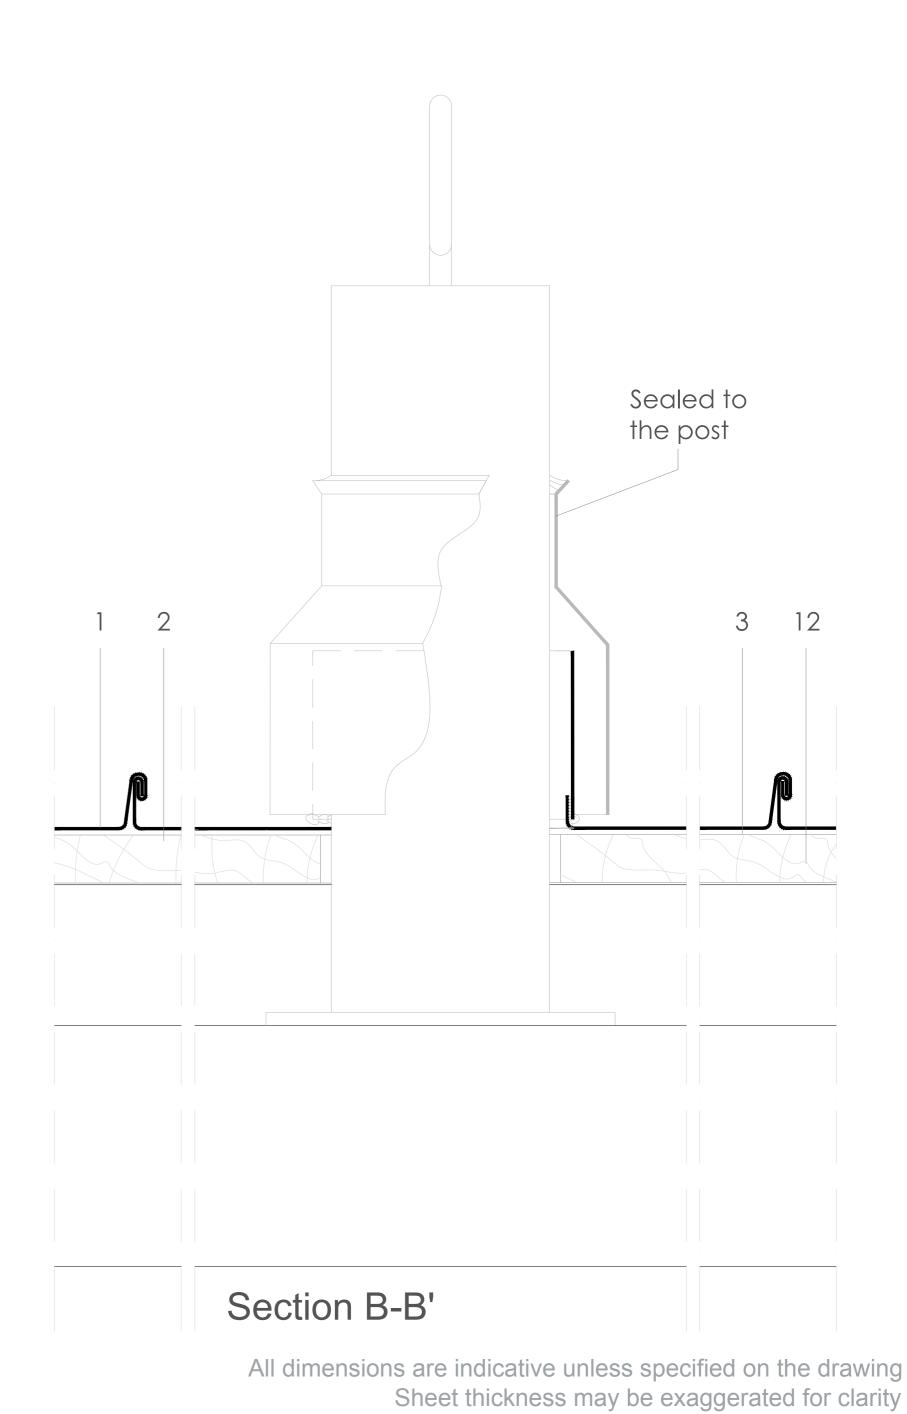

Scale 1/5

- Notes:
- Circular posts. Try to coordinate the positioning of the posts such that they do not interrupt a seam.
- Use elZinc® fluxes and strippers when preparing the material for soldering.
- Generic structural details are shown for illustrative purposes only.
- 1. elZinc® cladding
- Membrane
- Structural underlay
- Folded galvanised steel profiles
- elZinc® perforated sheet
- elZinc® retention profile
- Insulation
- elZinc® hung gutter
- Gutter clip
- Gutter bracket
- elZinc® clip
- Substrate









Traditional systems - Double lock standing seam

DLSS 17.1.02. Circular fall arrest post fixed through cladding

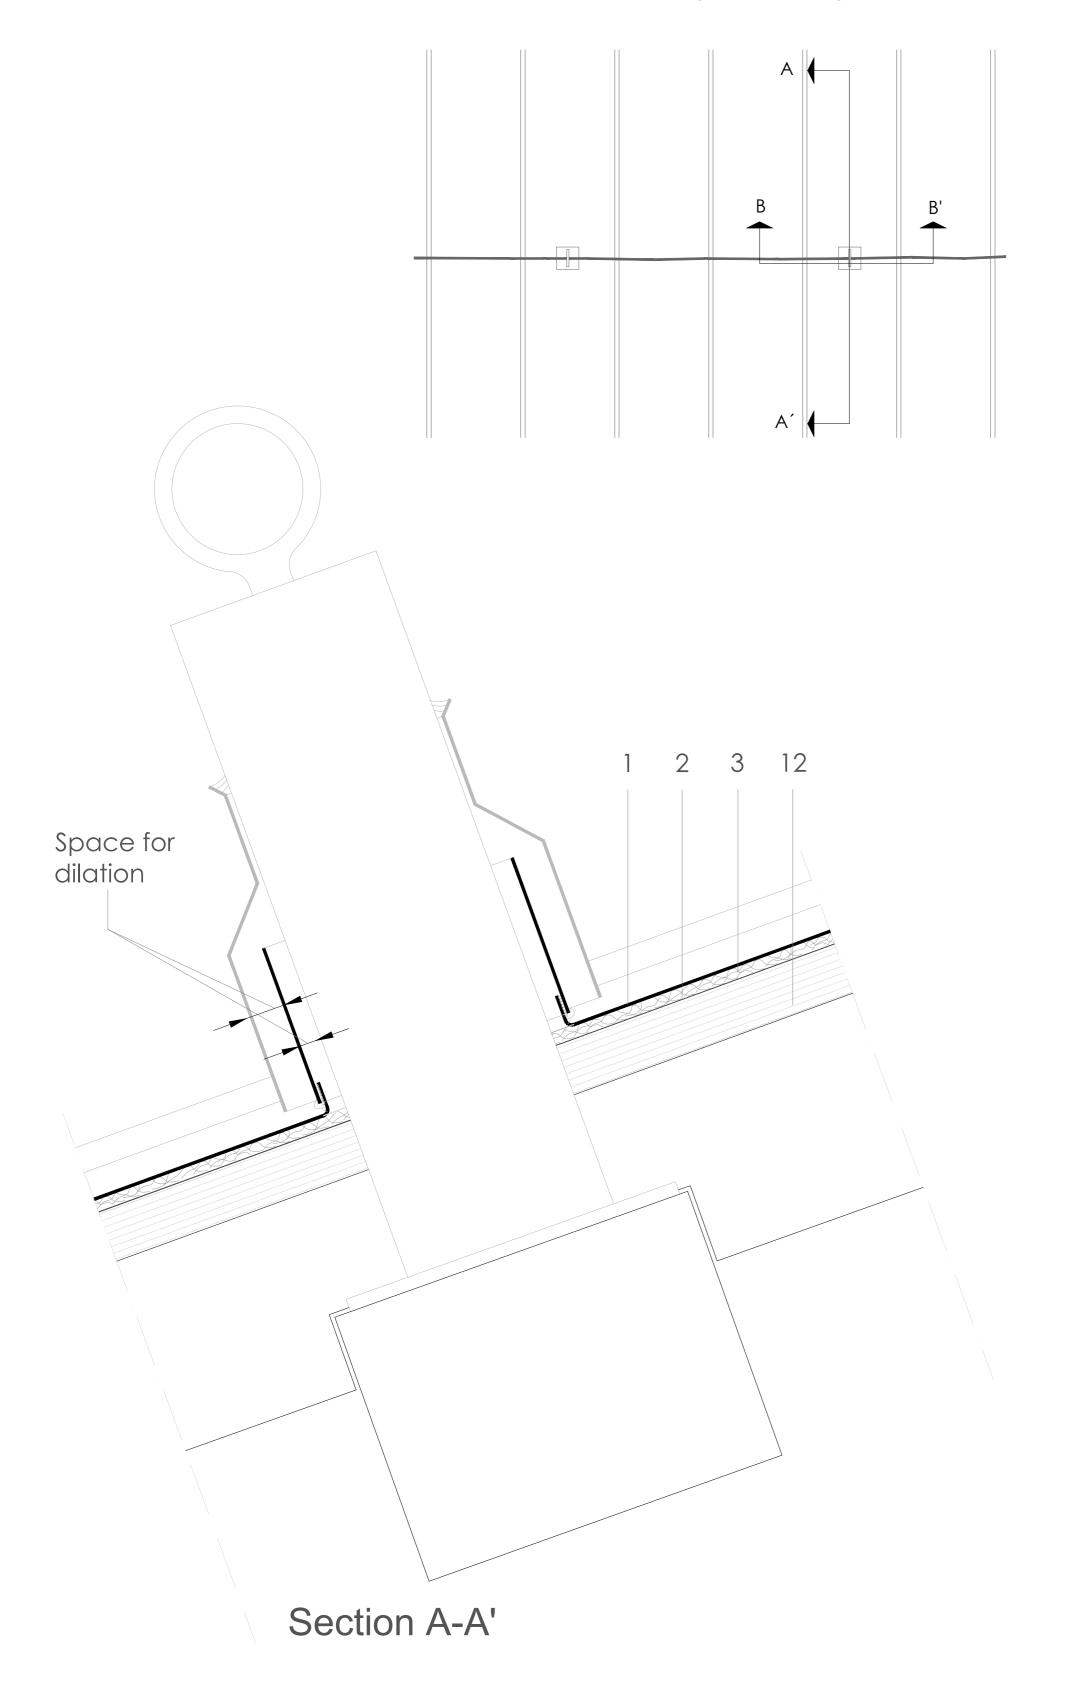

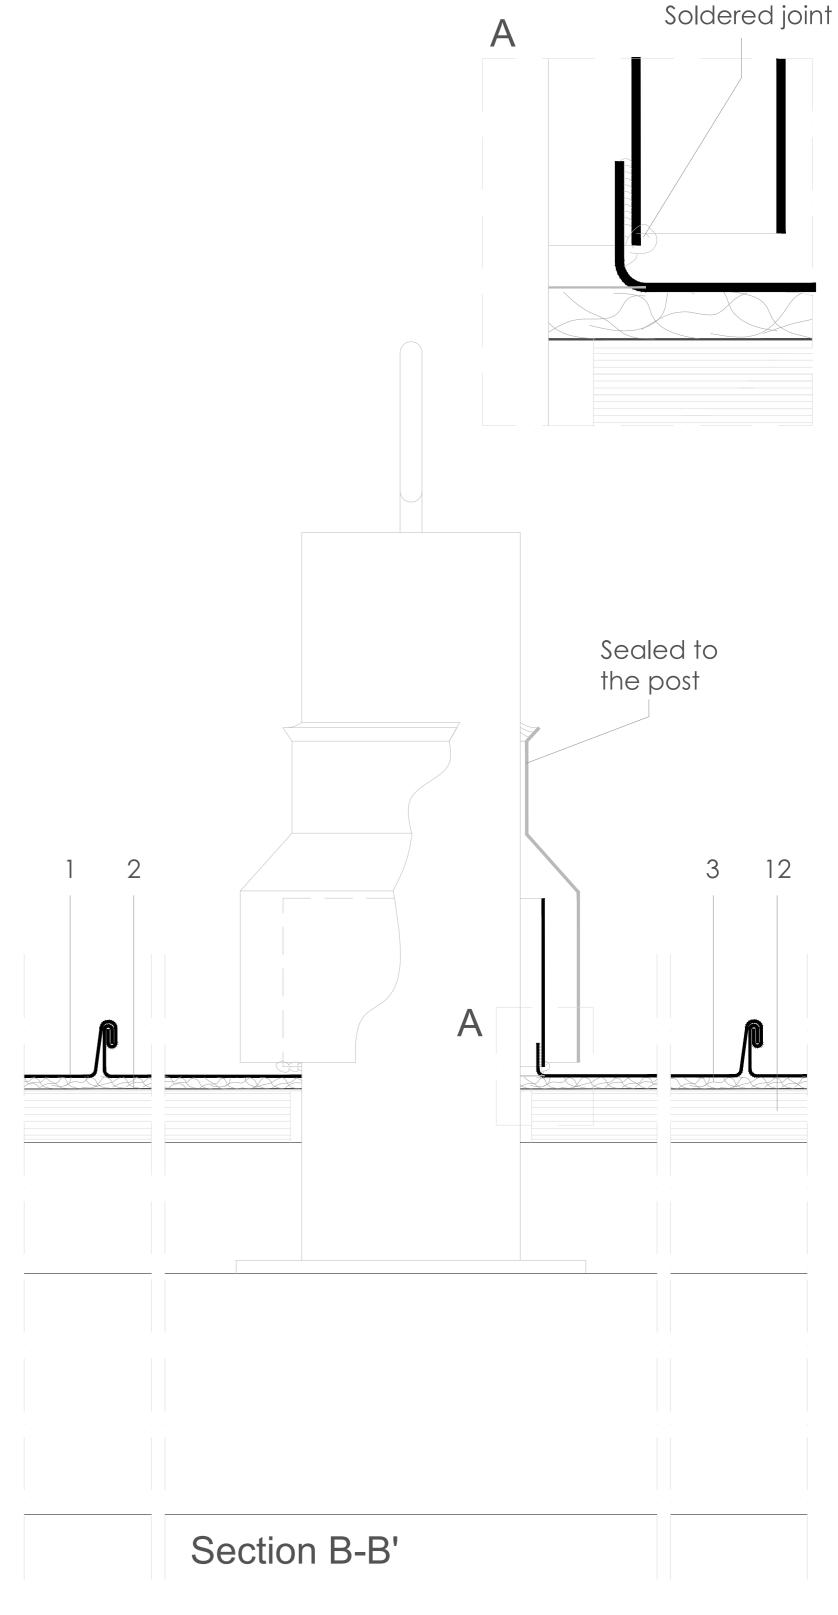

Scale 1/5

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

Notes:

- Rectangular posts.
- Try to coordinate the positioning of the posts such that they do not interrupt a seam.
- Use elZinc® fluxes and strippers when preparing the material for soldering.
- Generic structural details are shown for illustrative purposes only. See manufacturer's instructions for the correct installation of the fall arrest system.
- 1. elZinc® cladding
- Membrane
- Structural underlay
- Folded galvanised steel profiles
- elZinc® perforated sheet
- elZinc® retention profile
- Insulation
- elZinc® hung gutter
- Gutter clip
- Gutter bracket
- 11. elZinc® clip
- Substrate





