
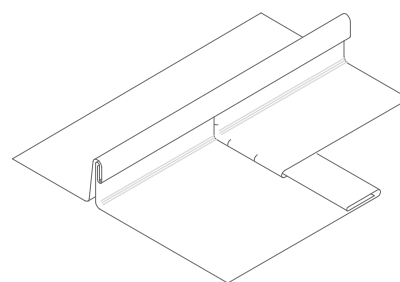


DLSS FG 2.3.01 Preformed double lock cross welt.

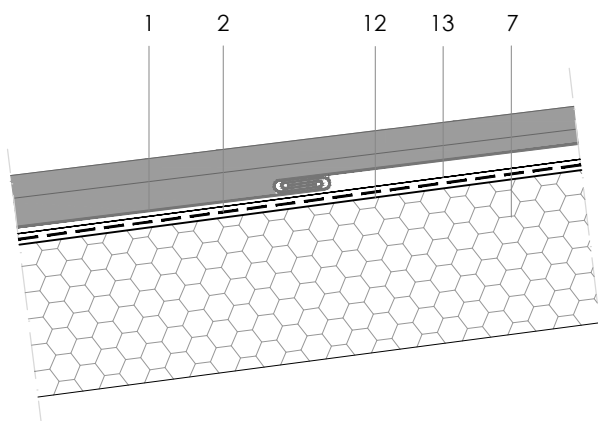

Scale 1/4

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Notes:

- Minimum recommended pitch 7°.

- elZinc® cladding Protect+
- Roofing membrane
- Structural underlay
- Folded galvanised steel profiles
- elZinc® perforated sheet
- elZinc® retention profile
- Celular glass insulation
- elZinc® hung gutter
- Gutter clip
- Gutter bracket
- elZinc® clip
- Hot applied bitumen
- Separating membrane
- Fixing plate in galvanised