



DLSS MD 2.1.01 Single lock cross welt.

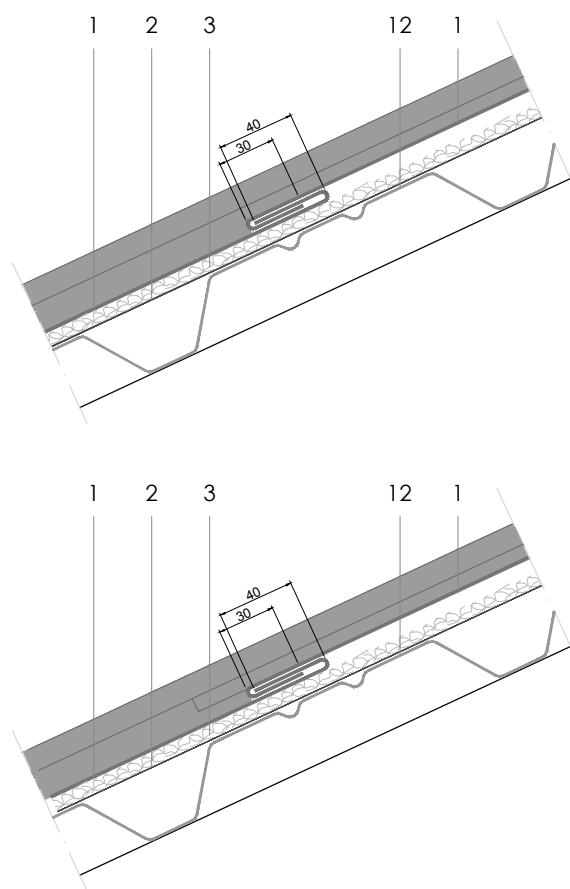

Cross welt underclock taken up standing seam

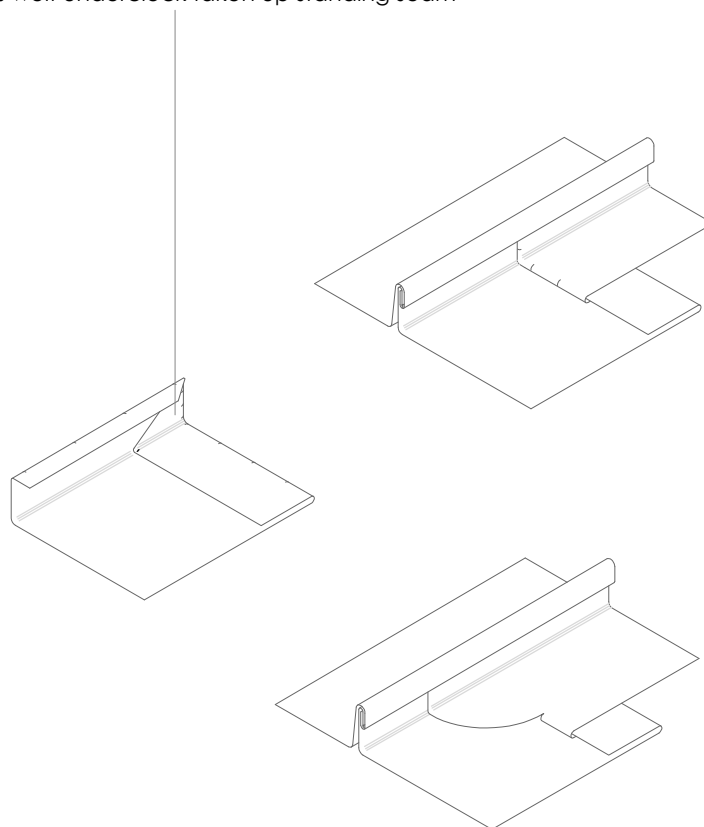

Scale 1/4

All dimensions are indicative unless specified on the drawing
Sheet thickness may be exaggerated for clarity

Notes:

- Minimum recommended pitch: 25°

- elZinc® cladding
- Membrane
- Structural underlay
- Folded galvanised steel profiles
- elZinc® perforated sheet
- elZinc® retention profile
- Insulation
- elZinc® hung gutter
- Gutter clip
- Gutter bracket
- elZinc® clip
- Trapezoidal steel deck