


DLSS MD 4.1.04a Flat ventilated ridge.

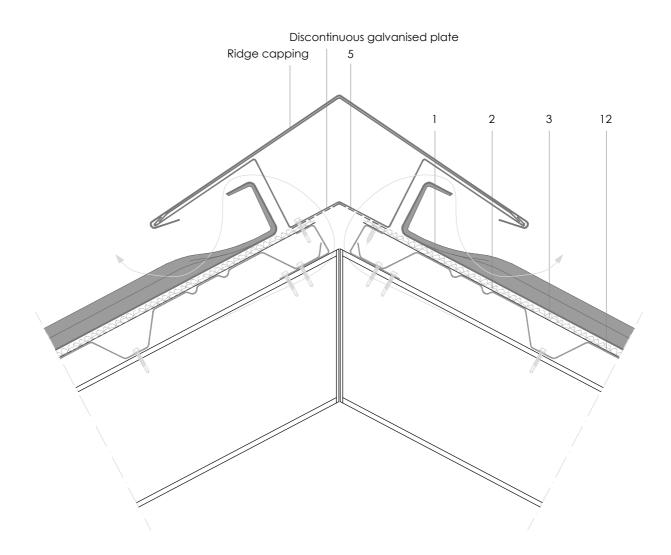

Scale 1/4

Notes:

- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: . DLSS 1.2.2.02b if roof of sufficient pitch.
- If vented hips are used on the same roof, these can be done with this same detail giving a clean hip to ridge joint.
- Outline structural details are shown for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Trapezoidal steel deck

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of eEI/no® cladding systems. It is the response the archited, building contractor and installer in any case to ensure the validity of the specific details employed on e project. Asia-eEI/no® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document.

All rights re rved with regard to this docu

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com