


DLSS MD 4.2.01a Square batten ridge.

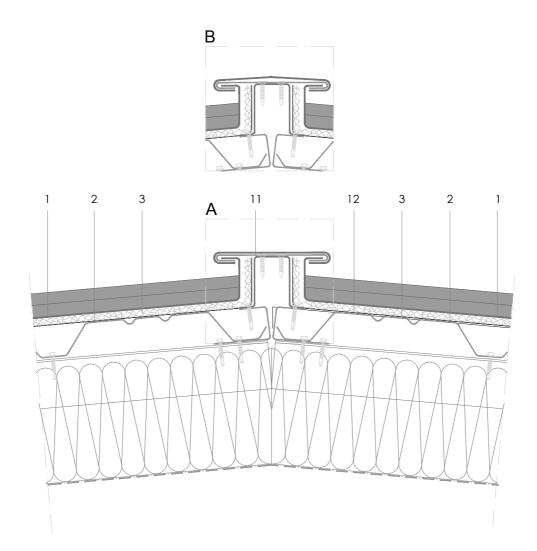

Scale 1/4

Notes:

- Used on non-vented roofs, cross-vented roofs or roofs using ventilation hoods.
- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: turned down upstand DLSS 1.2.2.01.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- elZinc® cladding
 Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Trapezoidal steel deck

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing-has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of etZine® cladding systems it is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-etZine® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document.

information contained in this document All rights reserved with regard to this document. Non authorised use will be prosecute SUD SUD

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com