


DLSS MD 5.1.01a Flat ventilated hip.

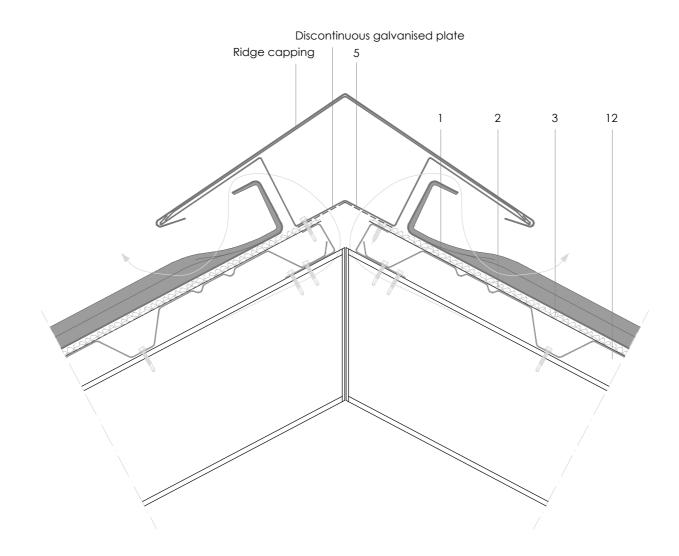

Scale 1/4

Notes:

- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: . DLSS 1.2.2.02b if roof of sufficient pitch.
- Gives a smooth hip to ridge transistion if used with its sister detail, DLSS 4.1.04.
- Outline structural details are shown for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Trapezoidal steel deck

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of eZno® cladding systems. It is the response the archited, building contractor and installer in any case to ensure the validity of the specific details employed on er project. Asia-etZno® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document.

All rights re

rved with regard to this docu

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com