


Traditional systems - Double lock standing seam

DLSS RI 3.2.1.03 Junction gutter.

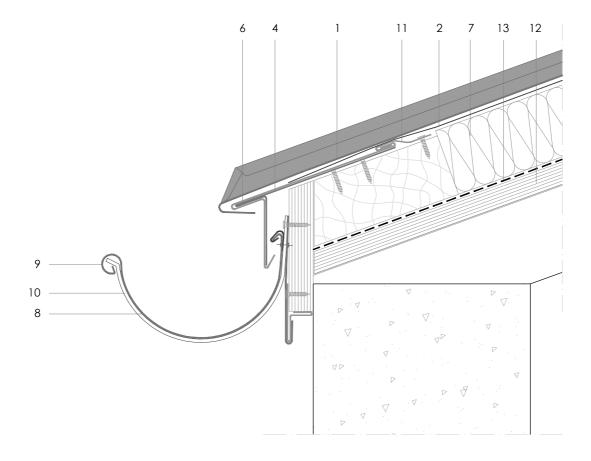

Scale 1/4

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

Notes:

- A box section gutter profile can be used as an alternative to half round.
- Outline roof structural details are shown for indicative purposes only-consult insulation manufacturer for further details.
- 1. elZinc® cladding Protect+
- 2. Separating membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Rigid insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate (Ply or Metal Deck)
- 13. High performance vapour barrier
- 14. Rigid insulation fixing clip

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZino® cladding systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-elZino® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document





elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000

Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A.
Pol. Ind. de Villallana, Parcela 1
33695 Pola de Lena, Asturias, Spain
elzinc@aslazinc.com