


DLSS RI 6.2.03 Head verge wall abutment.

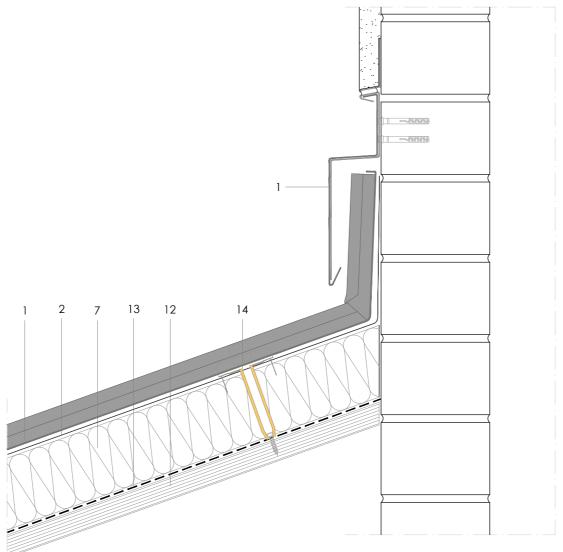

Scale 1/4

Notes:

- A box section gutter profile can be used as an alternative to half round.
- Outline roof structural details are shown for indicative purposes only-consult insulation manufacturer for further details.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding Protect+
- 2. Separating membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Rigid insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate (Ply or Metal Deck)
- 13. High performance vapour barrier
- 14. Rigid insulation fixing clip

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of eZinc® cladding systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-etZinc@ rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document.

All rights res rved with regard to this document. Non authorised use will be pro-

elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es

Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com