


Traditional systems - Double lock standing seam

DLSS 3.1.1b Free flowing over zinc cladding.

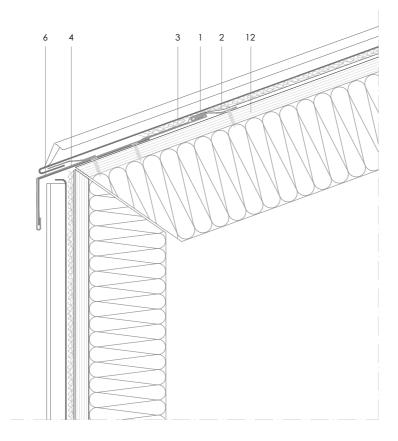

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

Scale 1/5

Notes:

Outline roof structural details are shown for indicative purposes only.

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS

The information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of exince clading systems. It is the responsable the architect, building contractor and installer in any case to ensure the validity of the specific details employed on earl project. Asia-el/Zinc® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document





Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com