


Traditional systems - Double lock standing seam

DLSS 3.1.2b Free flowing over other cladding.

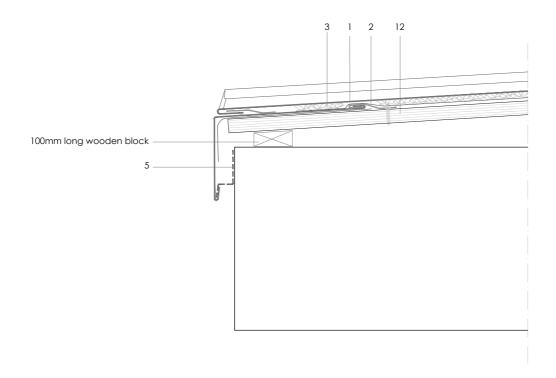

Scale 1/5

Notes:

• Outline roof structural details are shown for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The information contanted in this document-drawing-has a purely informative function and been elaborated with the intention of assisting building professionals in regard to the installation of elZino® loading systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asia-alZino® rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document

All rights reserved with regard to this document.

Non authorised use will be pro



elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

01