


Traditional systems - Double lock standing seam

DLSS 5.1.01a Flat ventilated hip.

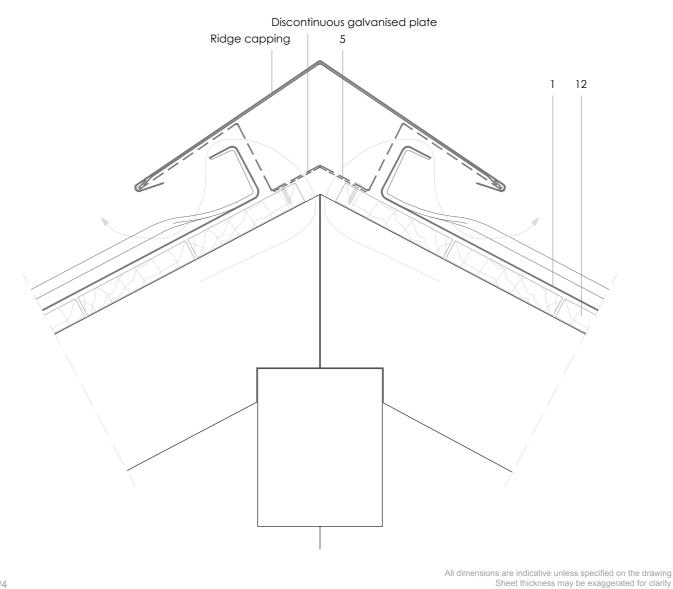

Scale 1/4

Notes:


- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: DLSS 1.2.2.02b if roof of sufficient pitch.
- Gives a smooth hip to ridge transistion if used with its sister detail, DLSS 4.1.04.
- Outline structural details are shown for indicative purposes only.
- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate





Traditional systems - Double lock standing seam

DLSS 5.1.01a Flat ventilated hip.

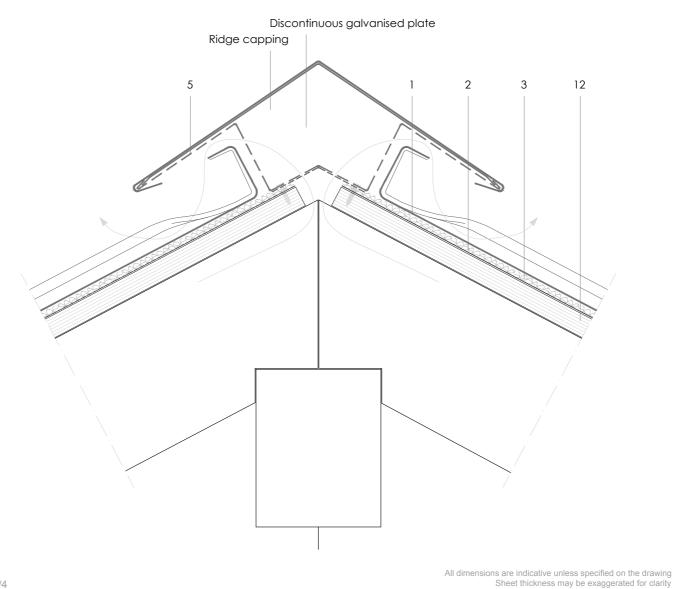

Scale 1/4

Notes:

- Head of seam shown finished according to DLSS 1.2.2.02a. Alternative: DLSS 1.2.2.02b if roof of sufficient pitch.
- Gives a smooth hip to ridge transistion if used with its sister detail, DLSS 4.1.04.
- Outline structural details are shown for indicative purposes only.
- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile

elZinc®

- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate



Tel. +34 985 676 000