


Traditional systems - Double lock standing seam

DLSS 8.4.01a Standing seam verge over ventilated angle seam cladding.

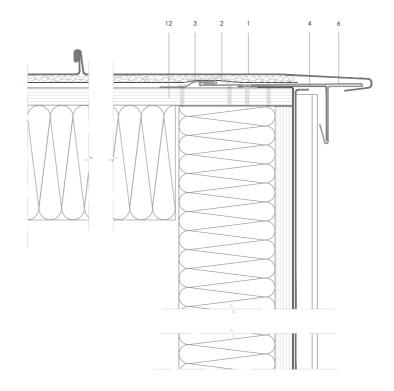

Scale 1/4

Notes:

• Appropriate for shallow verges.

All rights reserved with regard to this document.

• Outline structural details are shown for indicative purposes only.

All dimensions are indicative unless specified on the drawing Sheet thickness may be exaggerated for clarity

- 1. elZinc® cladding
- 2. Membrane
- 3. Structural underlay
- 4. Folded galvanised steel profiles
- 5. elZinc® perforated sheet
- 6. elZinc® retention profile
- 7. Insulation
- 8. elZinc® hung gutter
- 9. Gutter clip
- 10. Gutter bracket
- 11. elZinc® clip
- 12. Substrate

Sistema de Gestión de Calidad Certificado nº 12 100 42 851 TMS The Information contained in this document-drawing- has a purely informative function and been elaborated with the intention of assisting building porfessionals in regard to the installation of eE/no& cladding systems. It is the responsability of the architect, building contractor and installer in any case to ensure the validity of the specific details employed on each project. Asla-eE/2nc0 rejects any responsibility due to direct or indirect damage that may arise from the use of the information contained in this document

Non authorised use will be pros



elZinc® Tel. +34 985 676 000 Fax. +34 985 692 000 www.elzinc.es Asturiana de Laminados S.A. Pol. Ind. de Villallana, Parcela 1 33695 Pola de Lena, Asturias, Spain elzinc@aslazinc.com

01