


# STANDING SEAM FIXED CLIPS

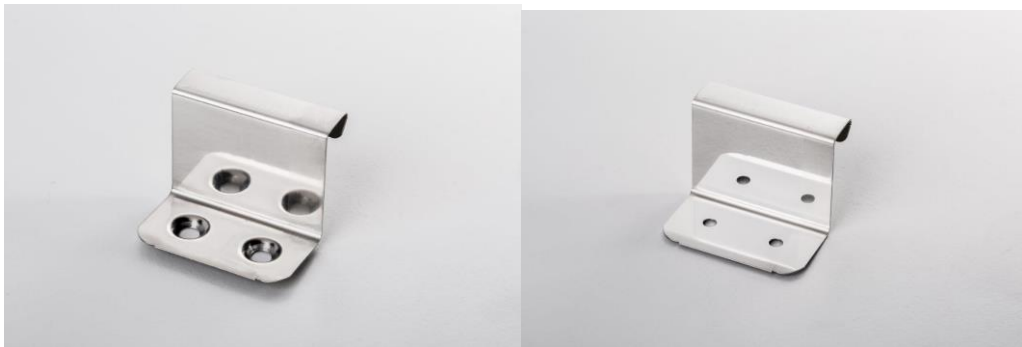

**Material:** Stainless steel      AISI: 304 Material-Nº 1.4301

**Main application:**

- Double lock standing seam roofing – pre profiled trays
- Angle seam cladding – pre profiled trays

**Installation:**

- Fix to substrate using appropriate corrosion resistant fasteners
- Ensure fastener heads are flush with clip base to avoid damaging underside of elZinc®
- Clip centres according to elZinc® guidelines and local regulations

**Features:**

- Rounded edges and splay protect the underside of the elZinc
- Design is according to the German Traditional Roofing Tradecraft Regulations
- Clip fits tight over undercloak preventing it from sliding down before fixing
- High resistance to wind uplift due to extra strength of base part

**Stock clip types:**

- 25 mm high for use with no underlay or a membrane underlay  
0,4mm thick - Countersunk holes
- 28 mm high for use with a matted structural underlay  
0,5mm thick - Normal or countersunk holes

**Other heights, thicknesses and hole type combinations available upon request.**

**Nº pieces/box: 500**

